

VEILAIR

「VEILAIR」，The soft effect of this velvet texture can be linked to the interweaving of light and shadow in the city, and its texture lies between delicate velvet and hazy curtains. It creates a thin and transparent layer on a velvet like substrate through special techniques, like pulling up a curtain in the twilight for the space
It softens and blurs the external scenery and light, reduces color saturation, and presents a high-end gray tone fusion. Smooth and gentle touch, achieving a unity of hazy visual beauty and soothing tactile sensation, perfectly defining the tranquil atmosphere of parting homes at dusk

main ingredients	Purified acrylic lotion, water, nano glass beads, nano pearl powder, cellulose	
Scope of application	Indoor, wall decoration use, especially for large areas, not suitable for outdoor use	
Supporting system	Primer (5kg)+Veilair (5kg)	
Supporting ratio	Primer: (5kg): 100g Inorganic colorant	Veilair: (5kg): 50g or color grading
supporting tools	Wool roller, wool line racket	
Base plane requirements	① New wall construction: Remove surface dust, grease, and loose putty. If there are pores and cracks, repair them. The wall must be firm, clean, dry, and flat ② Repainting the wall: To remove loose and unstable paint film, remove dust and powdery impurities from the wall, level and polish it, the wall must be firm, clean, dry and flat ③ The surface humidity of the pre coated substrate is less than 10%, and the pH value is less than 10 ④ To ensure the best wall coating effect, it is strongly recommended to use it in conjunction with primer ⑤ Due to the thin layer of the main material, it is recommended to apply a smooth rolling coating as much as possible during the construction of the base to increase the smoothness and tactile sensation of the main material	
Reference dosage	Primer: 4-5 m²/kg/2 coats	Veilair: 4-5 m²/kg/2 coats
Water addition ratio	The maximum proportion of materials added to this product shall not exceed 30%	
Construction method	① Roll coat two coats of primer (white alkali resistant sand primer with slurry), mixed with 20-25% water for use ② Add 20-25% water to the main material, roll it with a wool drum to apply a moderate thickness, and pat it irregularly with yarn before it dries to create a texture ③ After drying for 6 hours, reapply According to the design concept of the product, Vanlei recommends using a gold matte protective topcoat to increase the adaptability of the product	
Shelf life	At room temperature and in a dry state for 24 months (when the original product leaves the factory) mixing the main materials with water will inevitably affect the shelf life	
Standards	GB 30981.1-2025	

	Packaging: 5L		Reference dosage: 4-5m²/kg/2遍/2Times
---	---------------	---	--------------------------------------

Foshan City Nanhai Wanlei Building Paint Co., Ltd

528234 Wanshi Industry Area, Songgang, Shishan Town, Nanhai District,
Foshan City, Guangdong Province, China
+86-0757-81760676 info@fswanlei.com
vanlei.en.alibaba.com fswanlei.en.alibaba.com



VEILAIR

Transparent layers as light and delicate as gauze



City Series



VEILAIR.

Veilair, with its velvety soft effect,
can be associated with the interplay of light and
shadow in the urban setting

Its texture falls somewhere between delicate
velvet and hazy gauze

It is produced through special craftsmanship
Create a transparent layer as light and thin as gauze on a velvety base
Like drawing a curtain in the twilight for space

VEILAIR.

Creating thin and transparent layers on a velvet like substrate



Color matching



The existing textured wall surface

Veilair, is relatively thin and lightweight, with a final finish layer thickness of 0.03-0.05mm. Therefore, it cannot be directly applied to existing medium textures, such as orange peel or surfaces treated with a light trowel. The base surface should be reworked and evaluated

Construction Guide



01

Apply two coats of primer
(Shenjiang white alkali-resistant sand primer)
Use with 20-25% dilution



02

Apply a coat using a wool roller
(main material mixed with 20-25% water)
Before drying, use a woolen cloth to gently
pat it in an irregular manner



03

After drying for 6 hours
apply a new coat



04

Final completion effect

! Based on the design concept of the product,
Vanlei recommends using a matte finish to enhance the adaptability of the product

Supporting system



Primer



Veilair



Wool roller



Yarn brush

Construction tools

Coverage rate


Veilair (flat batch/finishing)

4 - 5 m²/kg (2 coats)

Product matching



- 1 Vanlei sedimentation sand primer: (5kg): 100g inorganic color paste
- 2 Veilair main material: (5kg): 50g or color grade




VEILAIR

The delicate and transparent layers, as light as gauze, form a curtain in the twilight



Veilair is made from a 100% acrylic lotion mixed with nano-sized fluff powder
It boasts a soft, silky surface with a matte finish
Veilair can be used for large areas, as a substitute for paint, or for decorative purposes

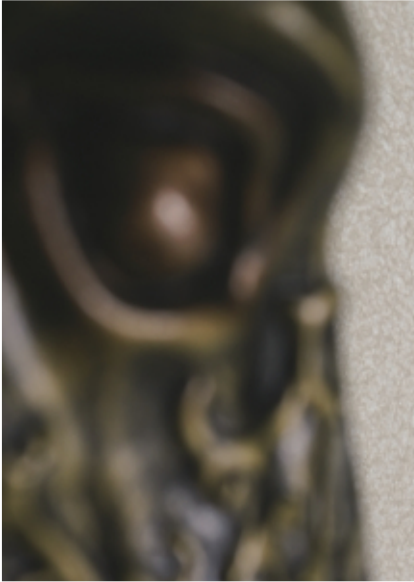

It softens and blurs the external
scenery and light
Reduce color saturation
Exhibiting a sophisticated blend
of gray tones

The touch feels smooth and gentle
Unify the hazy beauty of vision with the
soothing sensation of touch
The perfect embodiment of the serene
atmosphere of a home at dusk



Vanlei Adhering to its consistent "high-quality" ethos,
Vanlei Oxweave crafts the most exquisite wall finishes that are healthy, eco-friendly, and non-toxic
These finishes do not emit gases (zero VOC) and are hypoallergenic



Easy to maintain
Mildew-proof bacteria-proof design



RRM - 063(10g)



RRM - 063(20g)



RRM - 063(50g)



RRM - 002(10g)



RRM - 002(20g)



RRM - 002(50g)



RRM - 005(10g)



RRM - 005(20g)



RRM - 005(50g)



RRM - 045(10g)



RRM - 045(20g)



RRM - 045(50g)



Eco-design
Near-zero VOC, low VOC formula

VEILAIR / Creating thin and transparent layers on a velvet like substrate



RRM - 018(10g)



RRM - 018(20g)



RRM - 018(50g)



RRM - 042(10g)



RRM - 042(20g)



RRM - 042(50g)



RRM - 019(10g)



RRM - 019(20g)



RRM - 019(50g)



RRM - 066(10g)



RRM - 066(20g)



RRM - 066(50g)



RRM - 015(10g)



RRM - 015(20g)



RRM - 015(50g)



RRM - 004(10g)



RRM - 004(20g)



RRM - 004(50g)



RRM - 067(10g)



RRM - 067(20g)



RRM - 067(50g)



RRM - 048(10g)



RRM - 048(20g)



RRM - 048(50g)



RRM - 061(10g)



RRM - 061(20g)



RRM - 061(50g)



multiple styles
Create a retro and European style



easy to maintain
Waterproof function and
anti mold design