

SUEDEP

SUEDEP , Its texture pays more attention to replicating the luxurious touch of top-grade deer skin velvet, and its surface has short, dense, and abundant fibers Bring a sense of comfort enveloped in warmth. With time and touch, it will form subtle changes in color depth due to different refractions of light, known as unique "temperature marks"
This is not wear and tear, but a life imprint like leather patina, recording the touch of the palm and the sedimentation of time
It makes the home a warm living organism that can breathe and grow

Main ingredients	Purified acrylic lotion, water, nano glass beads, titanium dioxide, cellulose
Application	Indoor, wall decoration use, especially for large areas, not suitable for outdoor use
Supporting system	Primer (5kg) + Suedep (5kg)
Supporting ratio	Primer: (5kg): 100g Inorganic colorant Suedep: (5kg): 50g or color grading
Tools	Wool roller - YG090 brush - YG092
Base plane requirements	① New wall construction: Remove surface dust, grease, and loose putty. If there are pores and cracks, repair them. The wall must be firm, clean, dry, and flat ② Repainting the wall: To remove loose and unstable paint film, remove dust and powdery impurities from the wall, level and polish it, the wall must be firm, clean, dry and flat ③ The surface humidity of the pre coated substrate is less than 10%, and the pH value is less than 10 ④ To ensure the best wall coating effect, it is strongly recommended to use it in conjunction with primer ⑤ Due to the thin layer of the main material, it is recommended to apply a smooth rolling coating as much as possible during the construction of the base to increase the smoothness and tactile sensation of the main material
Reference dosage	Primer: 4-5m²/kg/2 coats Suedep: 5-6m²/kg/2 coats
Water addition ratio	The maximum proportion of materials added to this product shall not exceed 30%
Construction method	① Roll coat two coats of primer (white alkali resistant sand primer with slurry), mixed with 20-25% water for use ② Apply irregularly with a brush (add 15-20% water), with a thin brush as the main method ③ After drying for 8-10 hours, repeat once According to the design concept of the product, Vanlei recommends using a gold matte protective topcoat to increase the adaptability of the product
Shelf life	At room temperature and in a dry state for 24 months (when the original product leaves the factory) mixing the main materials with water will inevitably affect the shelf life
Standards	GB 30981.1-2025

	Packaging: 5L		Reference dosage: 5-6 m²/kg/2coats
---	---------------	---	------------------------------------

Foshan City Nanhai Wanlei Building Paint Co., Ltd

528234 Wanshi Industry Area, Songgang, Shishan Town, Nanhai District,
Foshan City, Guangdong Province, China
+86-0757-81760676 info@fswanlei.com
vanlei.en.alibaba.com fswanlei.en.alibaba.com



SUEDEP

The luxurious touch of top-grade suede



City Series

SUEDEP.

The name originates from Vanlei understanding and definition of urban life



Color matching




Due to its relatively thin and lightweight nature, the final decorative layer of SuedeP is 0.05-0.06mm thick
Therefore, it cannot be directly applied to existing medium textures
On surfaces such as orange peel or those with a light skip spatula, the base surface should be reworked and evaluated

SUEDEP

Its texture emphasizes the luxurious feel of replicated top-grade suede



SuedeP is made of 100% acrylic lotion mixed with nano-sized fluff powder
It boasts a soft, silky surface with a matte finish
SuedeP can be used for large areas, as a substitute for paint, or for decorative purposes

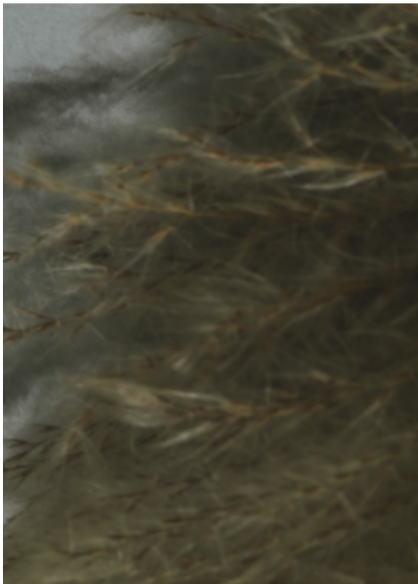

Adhering to its consistent "high-quality" ethos, Vanlei SuedeP crafts the most exquisite wall finishes that are healthy, eco-friendly, and non-toxic
These finishes do not emit gases (zero VOC) and are hypoallergenic
Our products not only exhibit boundless versatility in terms of appearance and feel, but they are also durable and suitable for both modern and traditional designs

1

City Traces
Series

vanlei®

/ SUEDEP



Its surface boasts a short, dense, and plump pile
Bring a reassuring tactile sensation enveloped by warmth

Luxury Touchness

Reproduction of top-quality deer skin velvet

With time and touch, it will develop subtle
variations in color depth due to different
refractions of light
That is, the unique "warm imprint"

This is not wear and tear, but rather a mark of
life, akin to the patina on leather
Capturing the touch of the palm and the
accumulation of time
It transforms a home into a warm, living
entity that breathes and grows



LRD - Base

Reflection



The base color is white. Suedep, with its bright white and pigment-free natural state, is supplemented with inorganic pigments to match the color scheme



LRD - 064(10g)



LRD - 064(20g)



LRD - 064(50g)



Appearance like mist
Gentle touch and diffuse reflection



LRD - 040(10g)



LRD - 040(20g)



LRD - 040(50g)



skin-friendly texture
Velvet is delicate and skin-friendly



LRD - 041(10g)



LRD - 041(20g)



LRD - 041(50g)



LRD - 010(10g)



LRD - 010(20g)



LRD - 010(50g)

Eco-friendly formula

Environmentally friendly formula design/

Vanlei adheres to the consistent style of "high quality", and Vanlei Suedep manufactures the most exquisite, healthy, environmentally friendly, and non-toxic wall finishes that do not release gases (zero VOC) and have low allergenicity

Our products not only have unlimited versatility in appearance and feel, but they are also durable and suitable for both modern and traditional designs



LRD - 002(10g)



LRD - 002(20g)



LRD - 002(50g)



Scratch resistance
Crack resistance weather resistance



LRD - 066(10g)



LRD - 066(20g)



LRD - 066(50g)



LRD - 042(10g)



LRD - 042(20g)



LRD - 042(50g)



LRD - 045(10g)



LRD - 045(20g)



LRD - 045(50g)



LRD - 015(10g)



LRD - 015(20g)



LRD - 015(50g)

Suedep. /

Continuous Extension

Fury leather/Warm and gorgeous

Elegant and sophisticated/comfortable and relaxed



LRD - 048(10g)



LRD - 048(20g)



LRD - 048(50g)

1

City Traces
Series



surface drying time / drying time
Calculated at 25-30 °C



Interval of 2 hours
surface drying




8 hours
completely dry

vanlei®



Easy to maintain
Mildew-proof bacteria-proof design

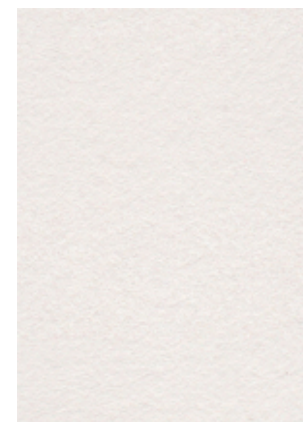

LRD - 065(10g)



LRD - 065(20g)



LRD - 065(50g)



LRD - 004(10g)



LRD - 004(20g)



LRD - 004(50g)



Towards zero VOC
Low VOC formula



Preferred Mansion
Effect and texture



LRD - 007(10g)




LRD - 007(20g)



LRD - 007(50g)



LRD - 061(10g)

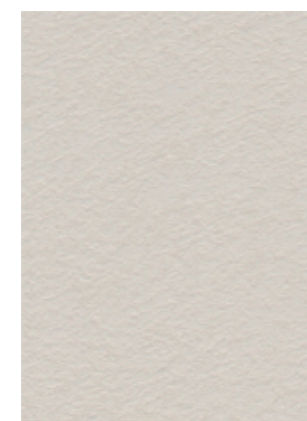

LRD - 061(20g)



LRD - 061(50g)



Large area seamless painting
Minor color difference


The Legend of leather

Leather Series/Deer Skin Velvet Feeling

The suede leather boasts a warm and luxurious texture, combining elegance and comfort with a relaxed feel. The precise craftsmanship carves out a soft and fluffy texture



LRD - 018(10g)

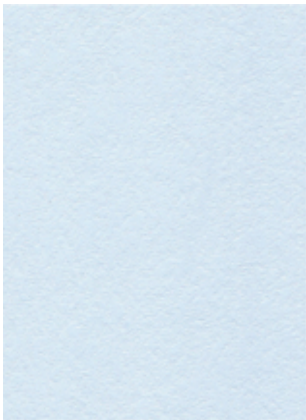

LRD - 018(20g)



LRD - 018(50g)



LRD - 019(10g)



LRD - 019(20g)



LRD - 019(50g)



LRD - 063(10g)



LRD - 063(20g)



LRD - 063(50g)



LRD - 050(10g)



LRD - 050(20g)



LRD - 050(50g)



LRD - 005(10g)



LRD - 005(20g)



LRD - 005(50g)



LRD - 067(10g)



LRD - 067(20g)



LRD - 067(50g)

Velvet Texture. /

Continuous Extension

Precision craftsmanship / soft velvet texture

Sticky texture / Exclusive elegance

SUEDEP

Its texture pays more attention to replicating the luxurious touch of top-grade deer fur velvet

Technical data	
nature	Solvent-free (water-based)
solid content	48% (±1)
dry film thickness	0.05-0.06mm
specific gravity	1.23kg/L (±0.05)
Paint film drying (surface drying)	<2h (25-30℃)
Recoating time/coating layer	8-10 hours (25-30℃) / 2 times
Drying time (hard)	72h
Glossiness (20-60-85°)	1.0, 4.4, 0.7
service life	"Over 10 years"
Color Selection	Multiple color options (base material color matching paste)

Base requirements

- ① Waterproof putty powder must be used, with a smooth surface and no peeling or powder falling off phenomenon.
- ② (Mild) When powder falls off, apply Wanlei penetrating primer once by roller and wait for 12 hours before construction

Gypsum board (indoor only): Before applying Suedep, the surface should be inspected and polished flat, using only mineral primer or recommended latex or acrylic primer

Existing paint substrates: As long as they are latex or acrylic (water-based), Vanlei Suedep can adhere to previously existing paint surfaces. We suggest polishing the surface for better adhesion and wiping off dust before applying gypsum. If necessary, use Vanlei Gold transparent primer or recommended latex or acrylic primer before applying Suedep

Existing textured walls: Suedep can be applied to existing medium textures such as orange peel or lightweight jumping spatula. Apply the first layer to cover the texture. Excessive thickness may result in slight cracking, as long as there is no delamination or peeling, which is acceptable

Construction Guide



01

Apply two coats of primer (settling white alkali-resistant sand primer) by roller coating
Use with 20-25% water



02

Apply a coat of paint irregularly using a brush (with 15-20% water added)
Primarily use a thin brush



03

After drying for 8-10 hours, repeat the process



04

Final completion effect



Please refrain from painting in humid or cold weather (temperature below 5°C and relative humidity greater than 85%) as the expected painting effect may not be achieved. Please use it in a well-ventilated area. If it is necessary to work in a closed environment, ventilation devices must be installed and appropriate protective gear must be worn

Supporting system



Primer



Suedep

Construction tools



Wool roller - YG090



Brush - YG092

Coating Rate

Suedep (flat batch/finishing)

5 - 6 m²/kg (2 coats)

Product matching



- ① Vanlei sedimented sand primer: (5kg): 100g inorganic color paste
- ② Suedep main material: (5kg): 50g or color grade