

Thickness /
From Nature
Used for wall surfaces

100%
AMBERSTONE

100% AMBERSTONE

Nature is one of Vanlei's eternal shareholders.
Natural textures are the most beautiful, the most classic
and the most eternal.

We are loyal to the raw materials in nature,
using natural mineral stone powder, and 100% promise that no foreign
organic color paste or additional preservatives are added.


VAN
LIME

SERIES



AMBER STONE

From Nature Used for wall surfaces

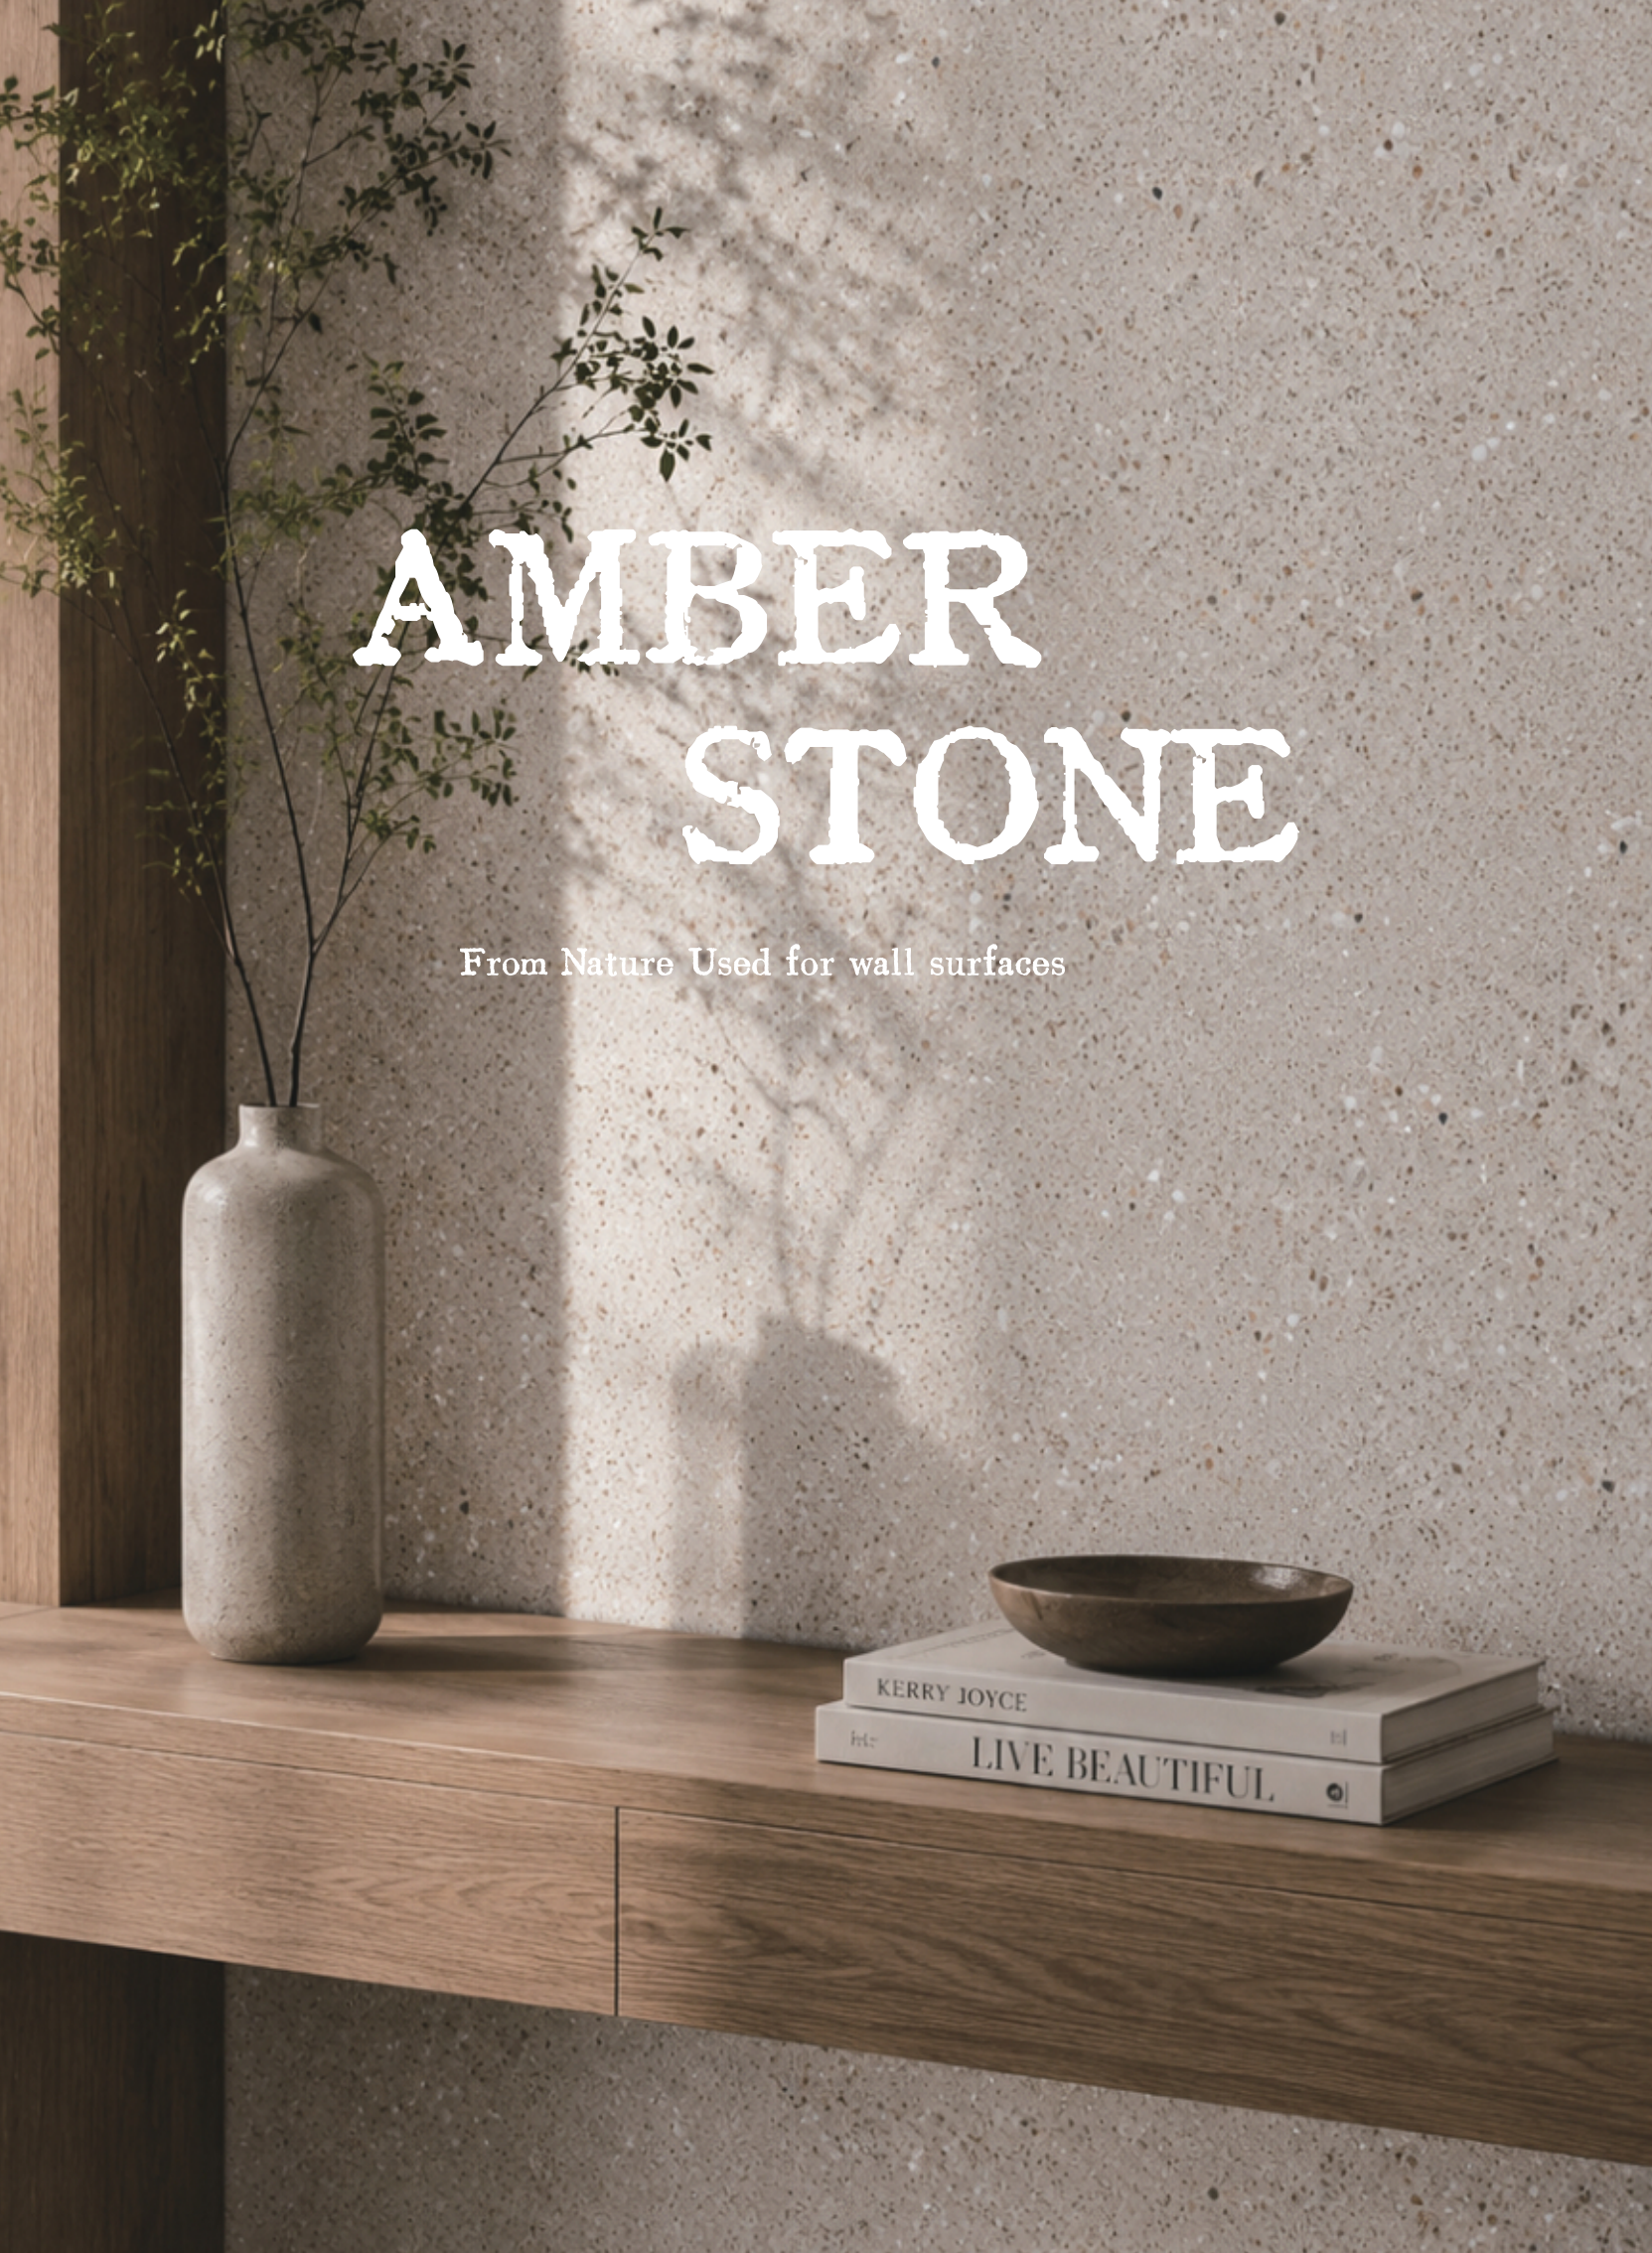



Pure natural hydrated lime products
natural and pollution-free



Natural Stone Color



HPJ – Base

Provide 20 color schemes, and different base materials should be adapted to different color paste systems
There are three forms of base materials, including chestnut, ink

Characteristics and physical properties	
Net Content	20kg
Solid content/specific gravity	100%
fire rating	A-class non combustible
specific gravity	1.05kg/L(±0.05)
Theoretical consumables	2.5-3kg/ m² /2 times
Drying time (calculated at 25°C and humidity <= 60)	Surface drying: 2 hours, recoating: 8-12 hours
PH value	10-11.5
thinner	Clear water, with a water ratio of 20kg to 7kg
Finished surface thickness	1-1.5mm

Interior Applied Only



Construction
video



It is normal for the color card color to differ slightly from the actual material color

100%
AMBERSTONE



Strong transparency,
presenting a natural mineral refraction halo

vanlei®



HPT - Base



HPQ - Base

It is normal for the color card color to differ slightly from the actual material color

100%
AMBERSTONE




29 ° enamel soft gloss
Warm and moist stone

vanlei®

Lightweight Surface

Natural Liquid Stone The Best Looking

Can be applied to most solid surfaces,
but it is necessary to ensure that the surface is thoroughly dry and aged

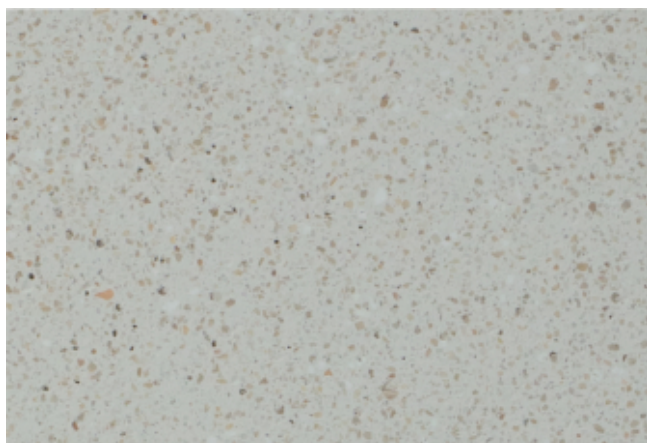

HPJ - M01(100g)



HPJ - M15(100g)



HPJ - M12(100g)



HPJ - 6276(100g)


It is normal for the color card color to differ slightly from the actual material color

100%
AMBERSTONE



Matte matte texture
not easily dirty and resistant to touch

anlei®

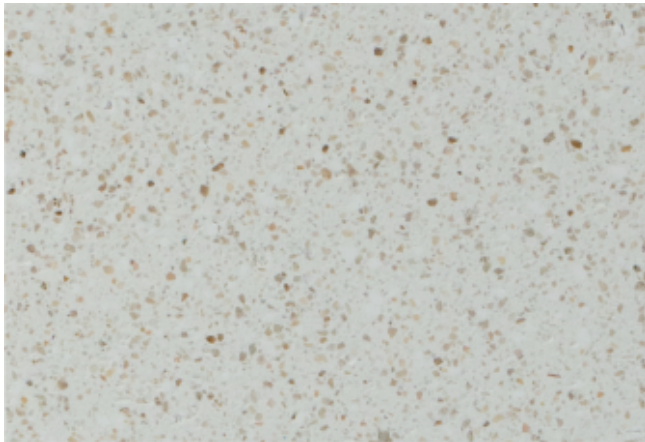


HPJ - M03(100g)



HPJ - M32(100g)



HPJ - 6274(100g)

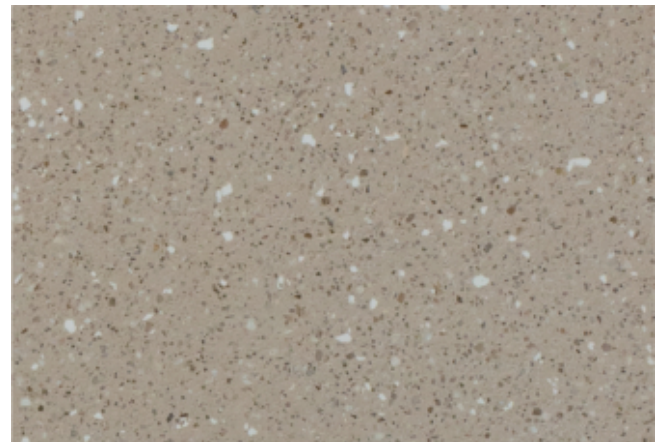

HPJ - M38(100g)



HPJ - M31(100g)



HPJ - M50(100g)



Excellent waterproof and moisture-proof performance
Has good waterproof performance


vanlei®




HPJ - M29(100g)



HPJ - M08(100g)

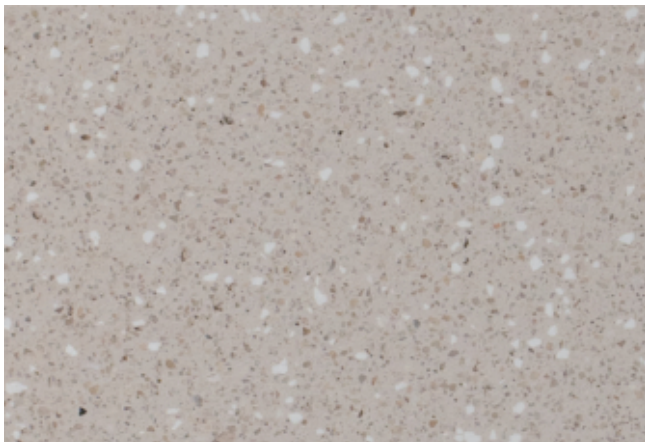

HPJ - M18(100g)

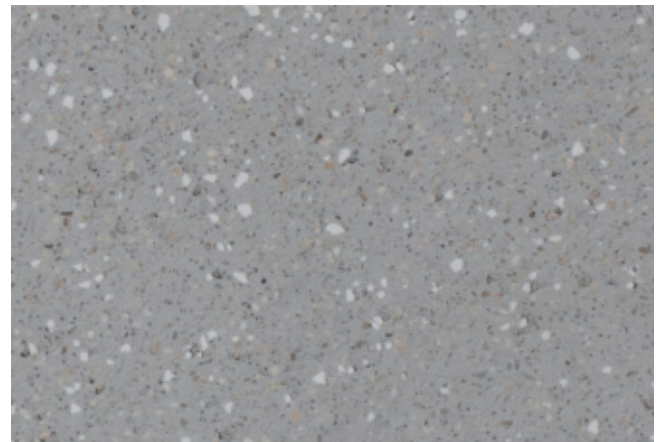

HPJ - 6281(100g)



HPJ - 6280(100g)




HPJ - M58

It is normal for the color card color to differ slightly from the actual material color

100%
AMBERSTONE

AMBER STONE


From Nature Used for wall surfaces

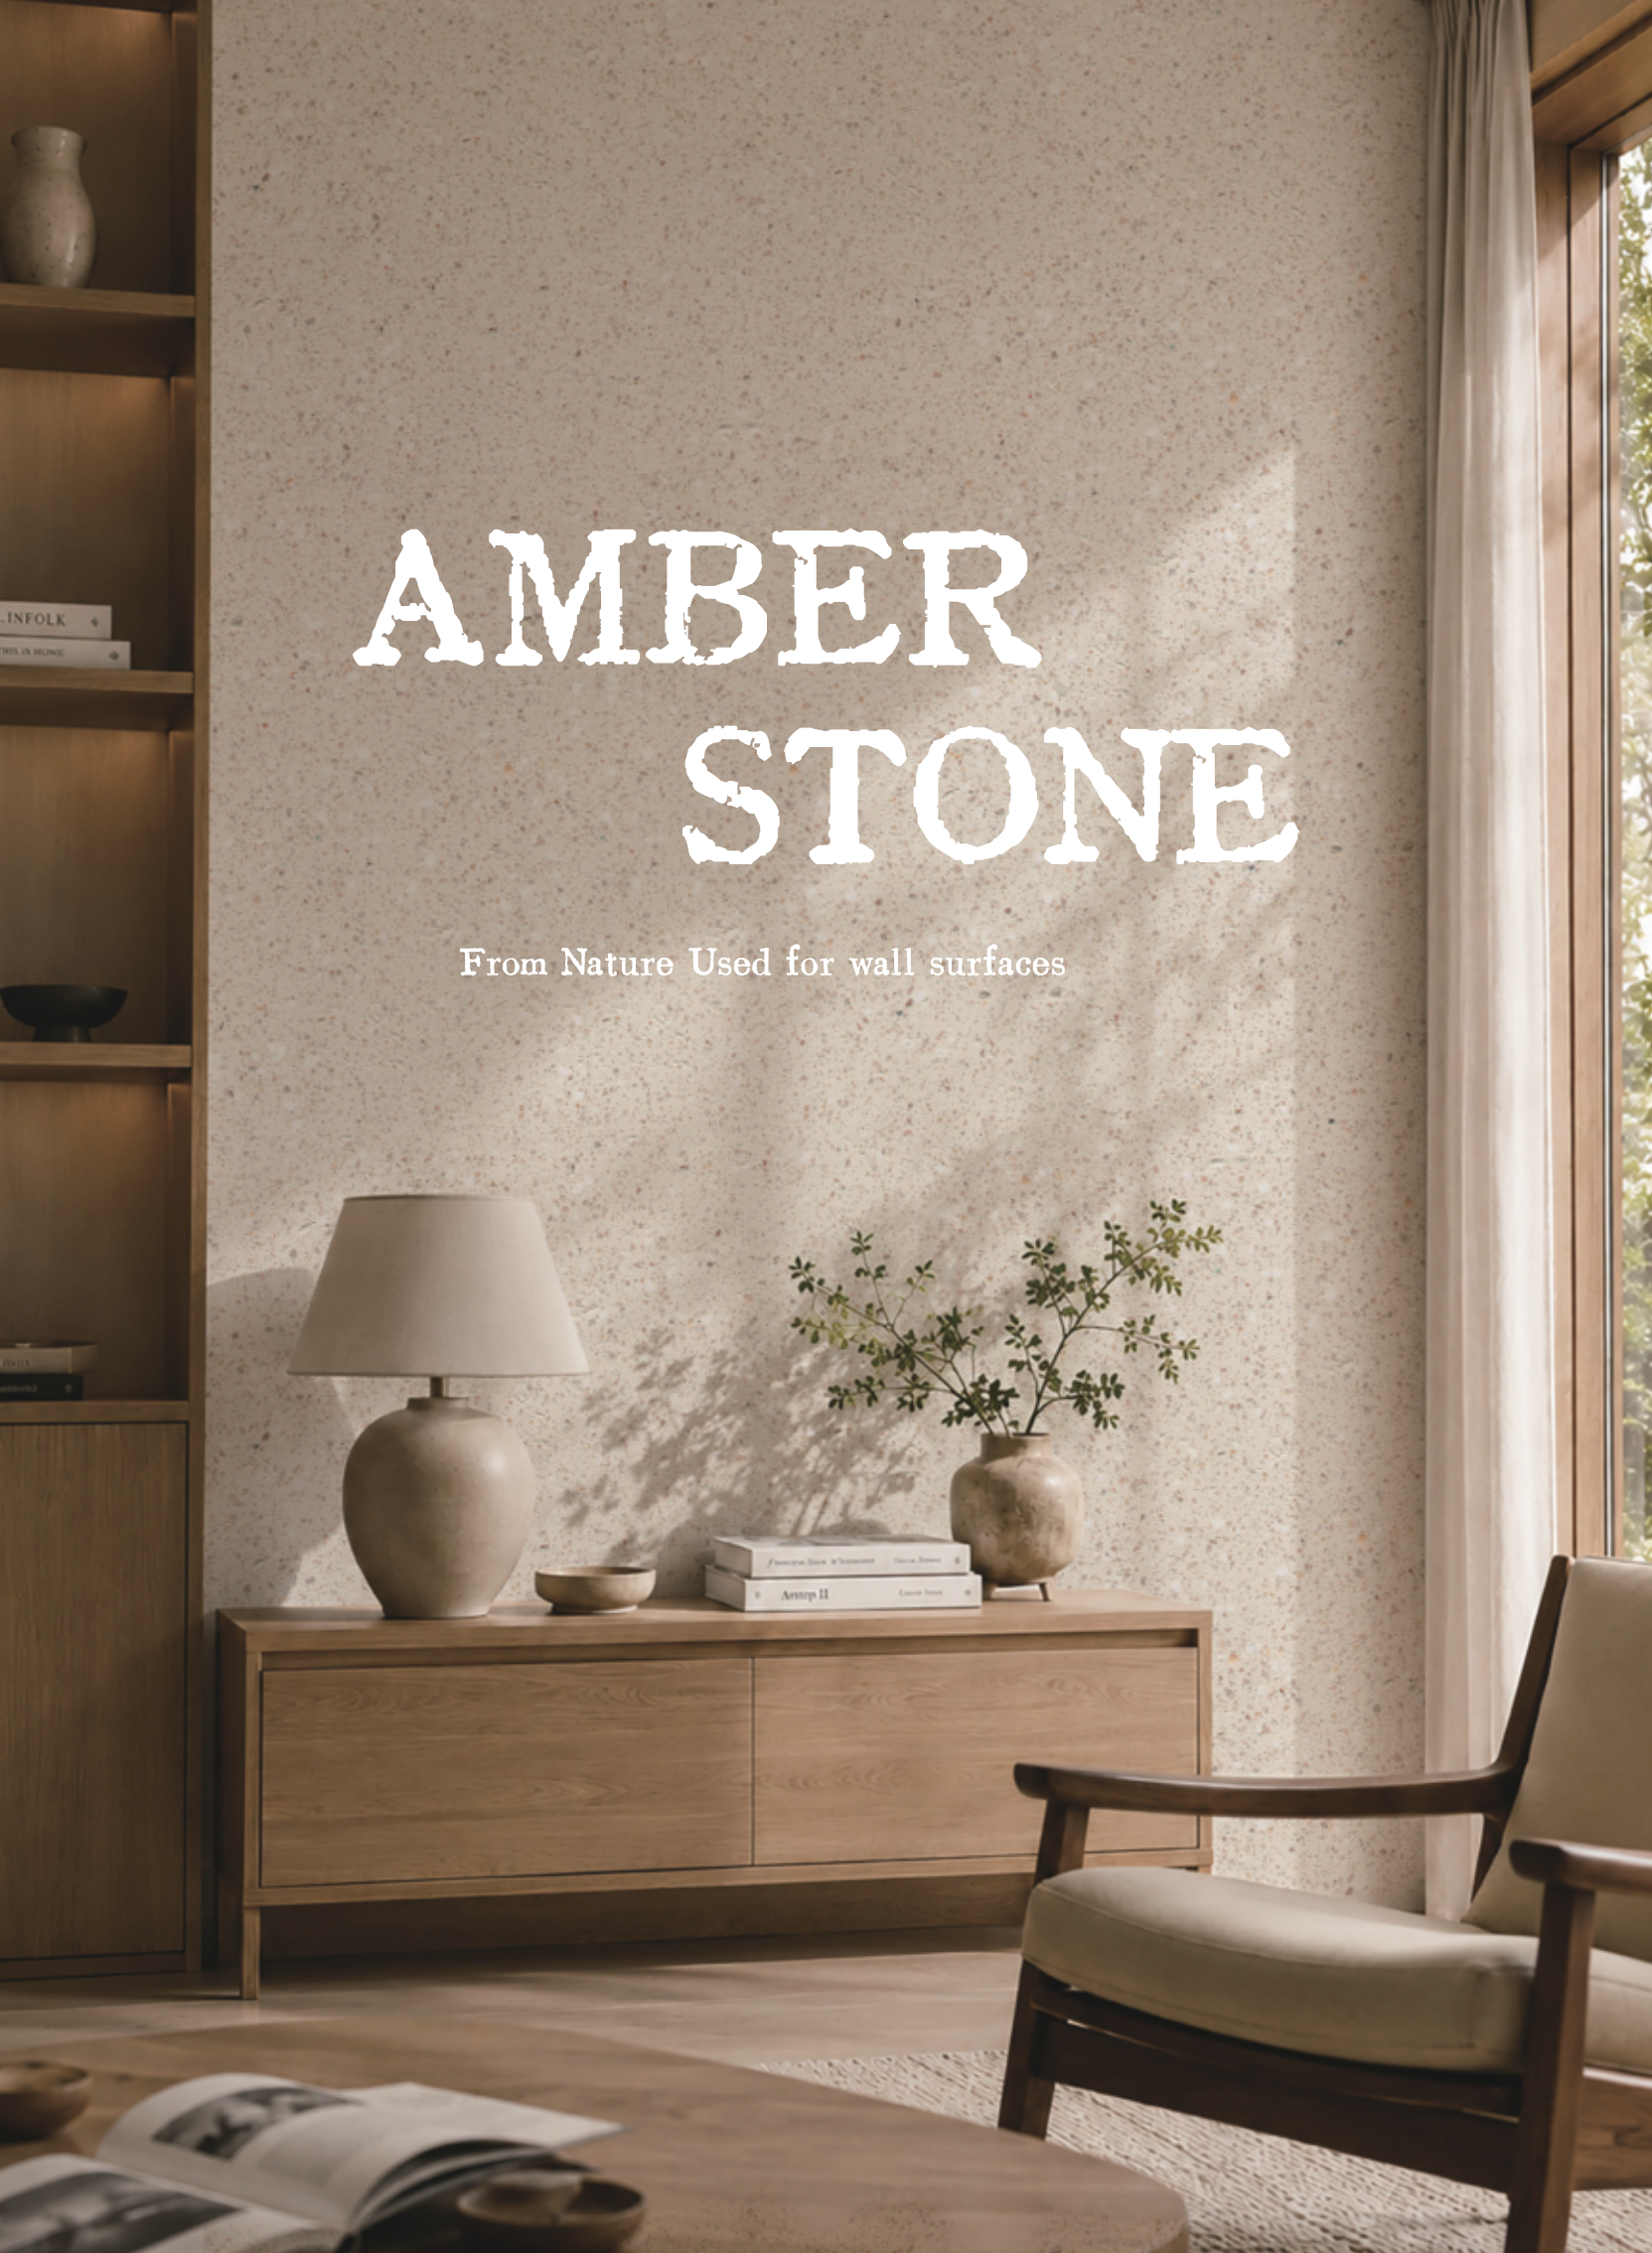

100% AMBERSTONE

EN.

Product Overview /	Amber Stone: The Art of Solidification
Main ingredients /	The name 'Amber stone' comes from amber, a natural mineral substance. The solidified body formed under the action of zero gel technology and time, therefore it represents the "natural result after time deposition". This product does not pursue bright colors or decorative elements, but simulates the comprehensive color tone of the earth, plants, and minerals after prolonged exposure to sunlight, presenting a gentle and restrained warmth. Amberstone is like condensed sunlight, with a warm color like golden resin flowing in the dim light. Liquid stone exhibits a translucent luster and delicate texture, possessing both amber-like depth and transparency, as well as strong weather resistance.
Tool /	Batch knife - YG114, shovel knife - YG075, wool drum - YG090, grinder - YG162
Color Mixing /	Use natural stone color and inorganic color paste for color matching.
Application /	Suitable for home/commercial indoor large wall surfaces.
Matching products /	Vanlei Penetrating primer + Vanlei Amberstone + Vanlei Ultimate matte finish.
Coverage rate /	2.5-3kg/m ² /2 times



01
Roller coated Vanlei Gold white/transparent primer (1/2 coat) Mix 15-20% water for use



02
Scrape a layer of main material with a stainless steel scraper (Thickness of about 1mm)



03
After drying thoroughly, use 180 grit sandpaper or a shovel to remove the protrusions Batch 2



04
After thorough drying, polish
Polishing process:
180 fine grinding -320 mesh precision grinding
-1000 mesh polishing (optional)



05
Cover layer (recommended to use ultimate matte cover) uniform Roll coating twice (add 10-15% water)

Foshan City Nanhai Wanlei Building Paint Co., Ltd

528234 Wanshi Industry Area, Songgang, Shishan Town, Nanhai District,
Foshan City, Guangdong Province, China
+86-0757-81760676 info@fswanlei.com
vanlei.en.alibaba.com fswanlei.en.alibaba.com

