



OXWEAVE

「OXWEAVE」, Featuring a warp and weft texture of finely woven Oxford cloth, it creates a three-dimensional texture with a strong sense of breathing on the wall. It is not as smooth as a mirror, but has a fabric-like texture with subtle vertical and horizontal gaps, interweaving light and shadow on it. Forming a soft layer like clouds and mist over the architectural complex, with a dense and firm touch, combining the tenderness of fabric with the structural sense of fabric. It makes the wall feel like a soft urban texture coat, enveloping the relaxation and shelter of the clouds.

Main ingredients	Clean acrylic lotion, water, titanium dioxide, nano glass beads, cellulose
application	Indoor, wall decoration use, especially for large areas, not suitable for outdoor use
Supporting system	Primer (5kg) + Oxweave (5kg)
Supporting ratio	Primer: (5kg): 100g Inorganic color paste Oxweave Main material: (5kg): 50g or color grade
Tools	Wool roller - YG135 grass racket - YG158
Base plane requirements	① New wall construction: Remove surface dust, grease, and loose putty. If there are pores and cracks, repair them. The wall must be firm, clean, dry, and flat. ② Repainting the wall: To remove loose and unstable paint film, remove dust and powdery impurities from the wall, level and polish it, the wall must be firm, clean, dry and flat. ③ The surface humidity of the pre-coated substrate is less than 10%, and the pH value is less than 10. ④ To ensure the best wall coating effect, it is strongly recommended to use it in conjunction with primer. ⑤ Due to the thin layer of the main material, it is recommended to apply a smooth rolling coating as much as possible during the construction of the base to increase the smoothness and tactile sensation of the main material.
Reference dosage	Primer: 4-5 m ² /kg/2 coats Oxweave: 3-3.5 m ² /kg/2 coats
Water addition ratio	The maximum proportion of material added to this product shall not exceed 15%
construction method	① Roll coat two coats of primer (white alkali-resistant sand primer with slurry), mixed with 20-25% water for use. ② Use a small sheepskin roller to apply once (add 10% water to the main material), and before it dries, gently pat irregularly with a green grass pat. ③ After drying for 8-10 hours, repeat once. According to the design concept of the product, Vanlei suggests using a gold matte finish to increase the adaptability of the product.
Shelf life	At room temperature and in a dry state for 24 months (when the original product leaves the factory), mixing the main materials with water will inevitably affect the shelf life.
Standards	GB 30981.1-2025

 Packaging: 5L	 Reference dosage: 3-3.5m ² /kg/2 coats
--	--

Foshan City Nanhai Wanlei Building Paint Co., Ltd

528234 Wanshi Industry Area, Songgang, Shishan Town, Nanhai District,
Foshan City, Guangdong Province, China
+86-0757-81760676 info@fswanlei.com
vanlei.en.alibaba.com fswanlei.en.alibaba.com



OXWEAVE



The warp and weft texture of Oxford cloth

6 City Traces Series

/ OXWEAVE

OXWEAVE.

The warp and weft texture of Oxford cloth

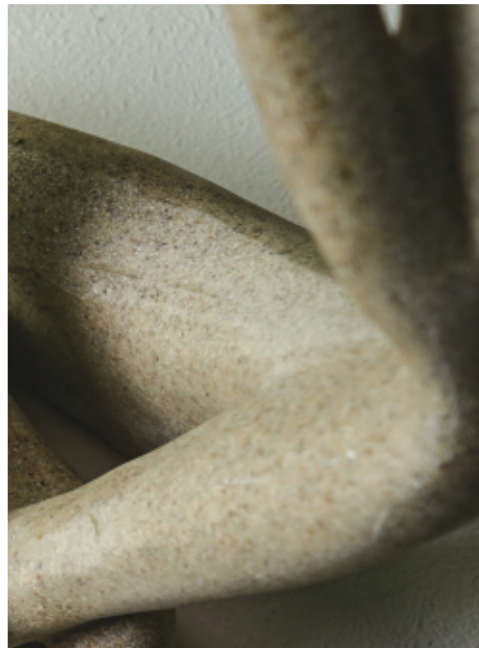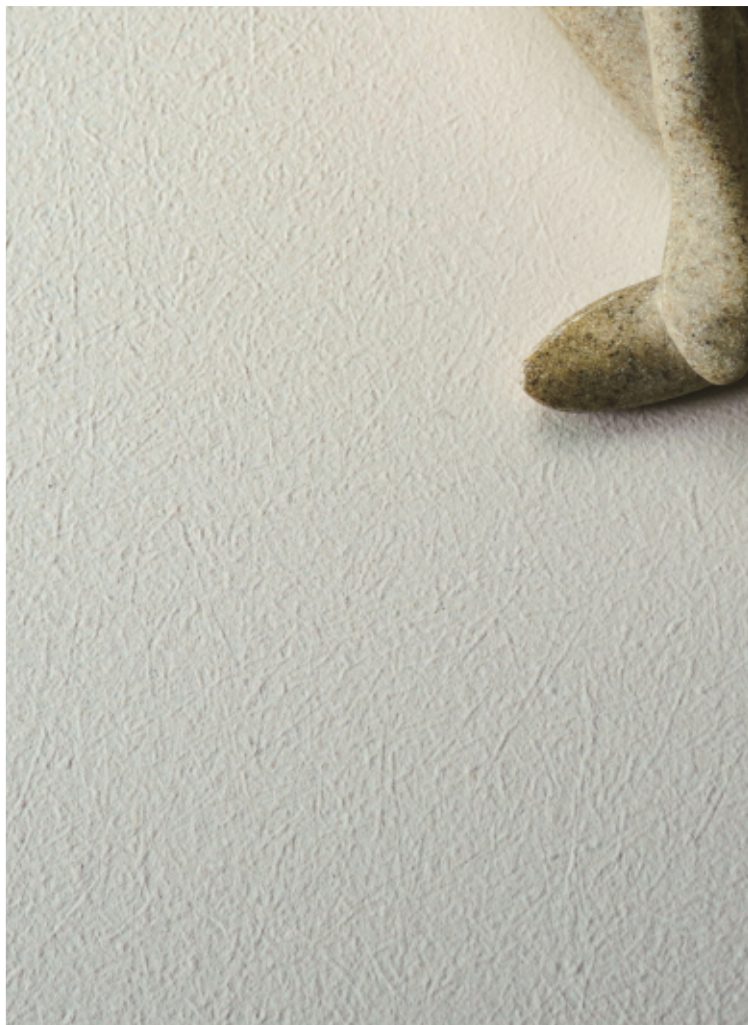

Color matching



Vanlei Adhering to its consistent "high-quality" ethos, Vanlei Oxweave crafts the most exquisite wall finishes that are healthy, eco-friendly, and non-toxic. These finishes do not emit gases (zero VOC) and are hypoallergenic. Our products not only exhibit infinite versatility in terms of appearance and feel, but they are also durable and suitable for both modern and traditional designs.

City Series

Color scheme selection

It is in a white state when not mixed
The basic state is white

Oxweave
Based on its bright white, pigment-free natural state
Supplemented with inorganic pigments to match the color scheme

Use of pigments and additives
Paired with Vanlei professional colorant (50g/bottle)
Inorganic color paste is used



ZWY - Base



Fine and continuous Oxford texture
soft touch



ZWY - 063(10g)



ZWY - 063(20g)



ZWY - 063(50g)



ZWY - 002(10g)



ZWY - 002(20g)



ZWY - 002(50g)



Soft pearlescent luster
Velvety smooth and skin-friendly



ZWY - 005(10g)



ZWY - 005(20g)



ZWY - 005(50g)



Easy to maintain
Mildew-proof bacteria-proof design



ZWY - 045(10g)



ZWY - 045(20g)



ZWY - 045(50g)

OXWEAVE

/ Featuring warp and weft textures of finely woven Oxford fabric



ZWY - 018(10g)



ZWY - 018(20g)



ZWY - 018(50g)



ZWY - 042(10g)



ZWY - 042(20g)



ZWY - 042(50g)



ZWY - 019(10g)



ZWY - 019(20g)



ZWY - 019(50g)



ZWY - 066(10g)



ZWY - 066(20g)



ZWY - 066(50g)



ZWY - 004(10g)



ZWY - 004(20g)



ZWY - 004(50g)



Grade I anti-pollution
scrub resistance



ZWY - 015(10g)



ZWY - 015(20g)




ZWY - 015(50g)



ZWY - 007(10g)



ZWY - 007(20g)

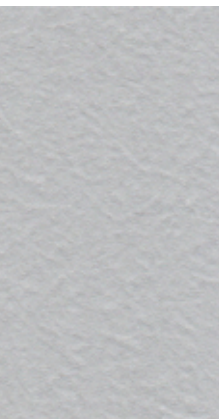

ZWY - 007(50g)



Can be applied over a large area
Seamless, subtle color difference



ZWY - 048(10g)



ZWY - 048(20g)



ZWY - 048(50g)



ZWY - 061(10g)



ZWY - 061(20g)



ZWY - 061(50g)

OXWEAVE

Definition of Urban Life

/ 6



Near-zero VOC
low VOC formula