

Italian spray paint



Italian spray paint

Inspired by Italy, this excellent product is widely used in the buildings of the ancient city of Florence. Not only is it beautiful, but it also uses the "constant temperature technology" developed by Vanlei, which can control the temperature difference between indoor and outdoor at around $\pm 15^{\circ}\text{C}$. There are nearly 100 colors to choose from, with a more eye-catching color matching system and a unique exotic atmosphere.



01. Main Ingredients

Special high hardness styrene-acrylic emulsion, calcined kaolin, quartz sand, cellulose, purified water

02. Product Features



A. Extremely low loss and wider coverage



B. High hardness, strong alkali resistance



C. No decolorization, safe and non-shedding



D. No resistance spraying, good flexibility, not easy to crack

03.Scope of application



Suitable for exterior walls. Applicable to cement mortar surface, gypsum board, concrete surface, clear water mold surface, pre-cast concrete board and other exterior wall building bases



Not suitable for interior walls.

04.Complementary system



Italian spray paint



Primer



topcoat

05.Technical parameters

Material Properties	Solvent-free (water-based)
---------------------	----------------------------

Dry film thickness	0.5-1mm
Drying time (surface drying)	<2h(25-27°C)
Drying time (hard)	>72h(25-27°C)
Coating layer	1 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C, cool, dry
Net Weight	20kg
Package	
bucket size	30*30*35cm

✓ **Reference Dosage** : 1-1.5kg/m²

✓ **Tools** : Special spray gun、 wool roller



✓ Special spray gun



✓ wool roller

06. Substrate requirements

- ① The base layer should be flat, clean, free of oil, hollow, and have good strength before construction.
 - ② Renovation of old walls: level the base, remove loose surface parts, clean dust, grease and other impurities before construction.
-

07. Construction method




01. Roll on 1-2 coats of primer (up to 20% water can be added) and cover evenly



02. Add color paste in proportion and stir evenly (Can add up to 10% water)



03. Use a special spray gun to spray the spray sand once

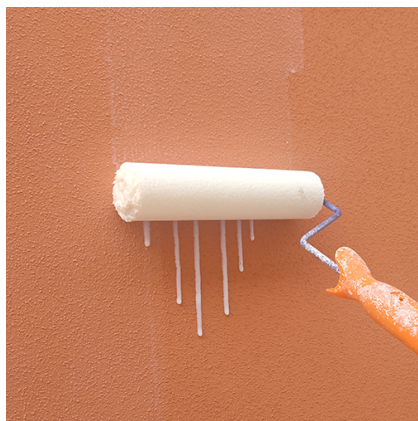

04. Roller coating (spray coating) two coats of topcoat (15~20% water can be added)

08. *Shelf life*

36 months in a dry state at room temperature (at the time of original shipment)

09. *Implementation Standard*

JG/T24-2018 Sand textured building coating based on synthetic resin emulsion

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10. *Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

- 1、 Read the construction instructions of the package before use to get reliable and satisfactory painting effect.
 - 2、 Please effectively separate, cover and shield the area of wood products and walls.
 - 3、 Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.
 - 4、 Colour difference may exist between different batches of the same model.
-

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).



WeChat Official Account



WeChat mini program