

vanlei万磊®



VANLEI STONE PAINT

无阻力真石漆

- 耗材少一点 · 施工快一点 -



SGS



RB 型



万磊无阻力真石漆（第六代RB型）*

万磊真石漆专业（RB型），采用万磊的无阻力喷涂配方，所能在选用石粒的时候集中采用粗一级的砂：在喷涂过程耗量极低，表面均匀度可以达到99.8%以上，所有的粗砂都能集中反应在墙面上，更能突显3D石材的效果。

产品特点

Product Features



A、无阻力喷涂，柔韧度好，不易开裂
A. Non-resistance spraying, good flexibility, not easy to crack.



C、快速还原建筑物的质感风貌
C. Rapidly restore the texture of the building's wind appearance

适用范围

Scope of application

适用于水泥砂浆面，石膏板，混泥土面，清水模面，金属板预铸混泥土板，铝板等外墙建筑基面

Suitable for cement mortar surface, gypsum board, plasterboard, concrete surface, fresh water mold surface, metal plate pre-cast concrete plate, aluminum plate and other exterior building substrates.

参考用量

Reference Dosage

真石漆（喷涂）2.5-3.5 KG/m²
Spraying: 2.5-3.5kg/m²

配套工具

Tools

羊毛辊筒、批刀、喷枪
Wool rollers, batch knives, spray guns

施工步骤

Construction step

- ① 辊涂抗碱封闭底漆（耗材数据：6-8m²/KG）一遍
- ② 完全干透后，用专用喷枪喷涂真石漆
喷涂（或刮涂）一至两遍，重涂间隔为2小时以上
- ③ 干燥后打磨去尘，辊涂（或喷涂）万磊专用面漆（耗材数据：8-10m²/KG）
① Roller coating anti-alkali sealing primer (consumable data: 6-8m²/kg) once
② completely dry, with a special spray gun spray stone paint spraying (or scraping) one to two times recoating interval of more than 2 hours after
③ drying sanding dust, roller coating (or spraying) Vanlei special topcoat (consumable data: 8-10m²/kg)

执行标准

Execution standards

GB24408-2009《建筑用外墙涂料中有害物质限量》
GB24408-2009

VANLEI STONE PAINT

Vanlei stone paint professional (RB type), using Vanlei non-resistance spraying formula, can be used in the selection of stone particles concentrate on the use of coarse sand: in the spraying process of very low consumption, the surface uniformity can reach more than 99.8%, all of the coarse sand can be concentrated in the reaction on the wall, and can highlight the effect of 3D stone.



B、高硬度、质感丰富不脱色
B. High hardness, rich texture and no discoloration



D、无“光污染”、无辐射，无坠落安全隐患
D. No "light pollution", no radiation, no fall safety hazards

真石漆参数

Product Parameters

天然砂 Natural sand	100% 100%	耐候性 Weather resistance	15年以上 Over 15 years
目数 Mesh count	60-100目 60-100Mesh	防水性 Waterproof	优等 Premium products
乳液 Emulsions	苯丙/纯丙（一级品） Frst-rate	反白现象 Be discolored	无 No
乳液含量 Emulsions content	10-15% 10-15%	表干时间 Surface drying time	2小时（常温下） 2 hours (at room temperature)
参考用量 Reference Dosage	2.5-3.5kg/m ² 2.5-3.5kg/m ²	施工工具 Tools	批刀、喷枪 Batch knife, spray gun
加水量 Dilution rate	10-15% 10-15%	厚度 Thickness	2mm 2mm
损耗率 Attrition rate	≤2% ≤2%	硬度 Durometer	1H 1H
固含量 Solid	≥85% ≥85%	可燃性 Flammable	无 No
抗污性 Antifouling	≥95% ≥95%	毒性 Poisonous	无 No

JG/T24-2001《合成树脂乳砂壁状建筑涂料》
JG/T24-2001

真石漆工程案例

NON - RESISTANCE NATURAL STONE CASE



浙江别墅内外墙工程



天盛长岛-外墙工程



安徽实验学校工程



深圳太子广场



北京碧水庄园别墅区




花都鸿利光电外墙工程



上海和平饭店工程

工艺流程 Process Flow

- 01 - 基层:经处理的墙面
01-Substrate: Treated wall surface
- 02 - 底层:抗碱底漆
02-Substrate: Anti-alkali primer
- 03 - 中层:真石漆
03-Middle layer: Real stone paint
- 04 - 面层:防水面漆
04-Finish: Waterproofing paint

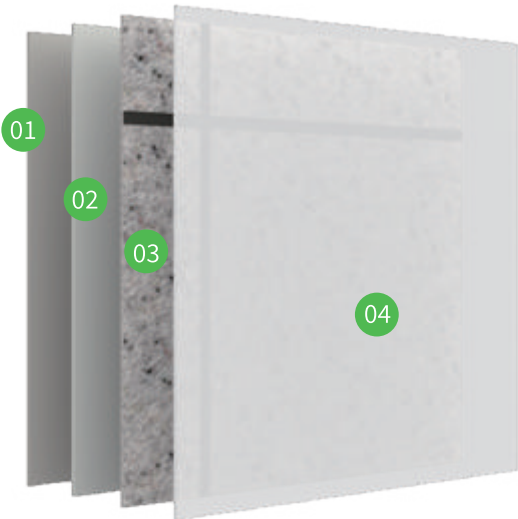

无阻力真石漆 6 advantages

6大优势



施工性能PK Construction Comparison

保持均匀分布, 具有超高的遮盖力, 完成后不需要打磨, 纹理自然不棘手
Maintains an even distribution with superb hiding power. No sanding required after finishing, natural and non-tacky texture.



丰满度PK Comparison of fullness

硅酸盐活性土, 减少材料的收缩比, 利用粉体与砂料之间的粘性互补空隙, 增大了涂布面积
Silicate activated clay, reducing the shrinkage ratio of the material, utilizing the viscous complementary voids between the powder and the sand, increasing the coating area.



涂布率PK Coating rate comparison

1平方, 最低需要2.5kg材料, 丰满度更高
1 square meter, minimum 2.5kg of material required, higher fullness.



耐候性PK Comparison of weather resistance

乳液中的贵族 - 耐白乳液, 保证10-15年的耐候性, 不发黄、不变色
Noble in the emulsion - white-resistant emulsion, guaranteed 10-15 years of weather resistance, no yellowing, no discoloration.



硬度PK Hardness Comparison

最高可以达到2H的硬度, 有效防止碰撞与开裂
Up to 2H hardness to prevent impacts and cracks.



防水能力PK Water Resistance Comparison

疏水型配方, 有效减少墙体渗水, 防止挂尘
Hydrophobic formula effectively reduces water seepage from walls and prevents dust from hanging.

注意: 由于石材来源于天然, 颜色有少许偏差实属正常, 间隔时间提货, 颜色有所偏差, 恕不另行通知。

Note: due to the natural source of stone, it is normal that there is a little deviation in color. It is normal to pick up the goods at an interval. If there is a deviation in color, no notice will be given.

本版面均为白料 + 色浆 真石漆白料:色浆 为 25kg:100g



RB-基料



RB-1A (100g)



RB-2A (100g)




RB-3A (100g)



RB-4A (100g)



RB-5A (100g)

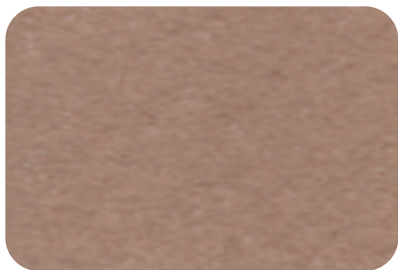

RB-6A (100g)



RB-7A (100g)



RB-8A (100g)



RB-9A (100g)



RB-10A (100g)



RB-11A (100g)



RB-12A (100g)



RB-13A (100g)




RB-14A (100g)




RB-15A (100g)



RB-16A (100g)

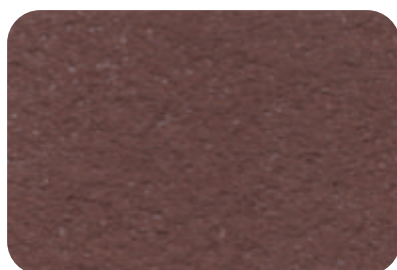


RB-17A (100g)

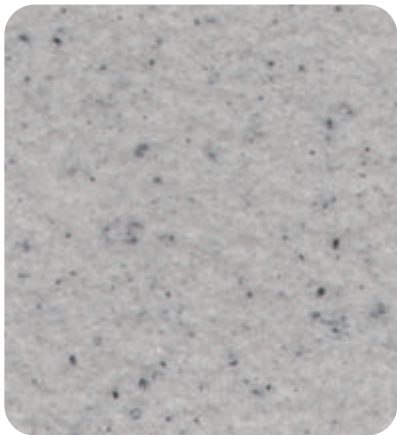

RB-202



RB-701

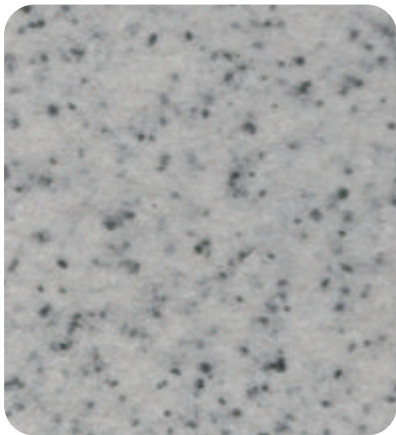


RB-105



RB-702A




RB-703

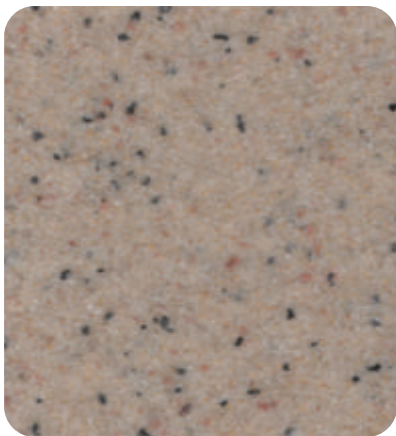

RB-704



RB-604

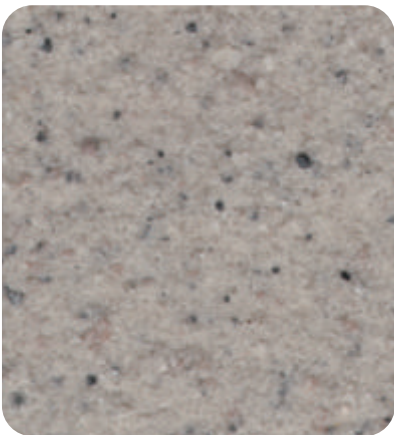


RB-705



RB-706




RB-403

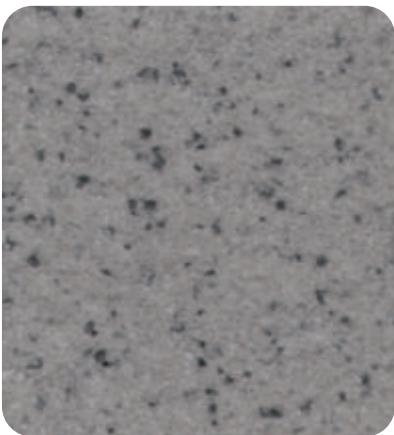

RB-707



RB-722

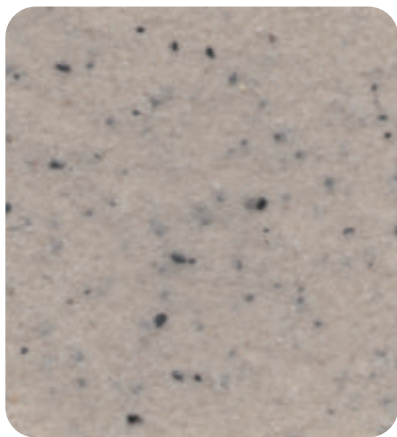

RB-709



RB-203



RB-710



RB-711



RB-712



RB-713



RB-714



RB-715



RB-716



RB-717A



RB-718



RB-505




RB-719A



RB-720A




RB-511

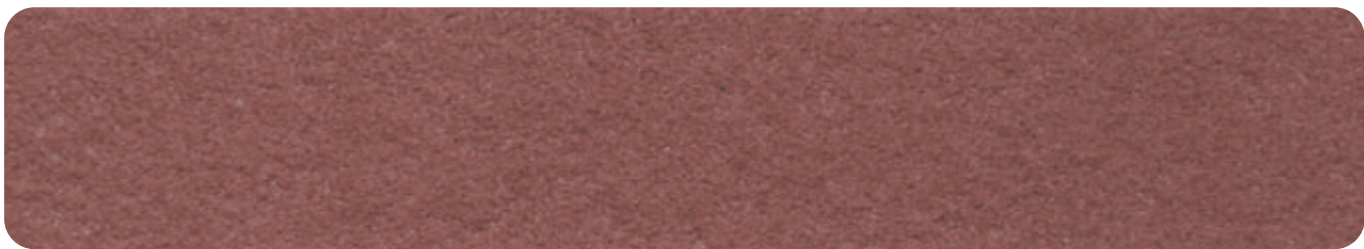


RB-18A(100g)



RB-721

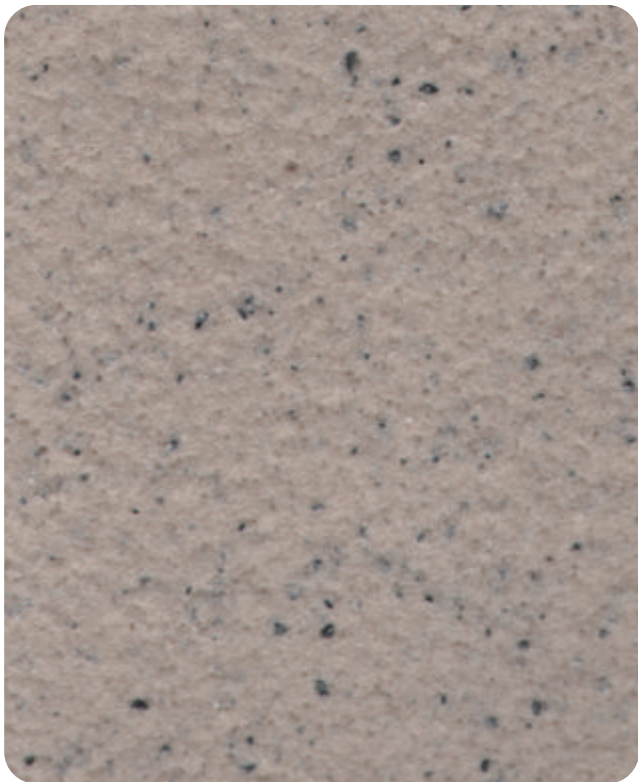

RB-724

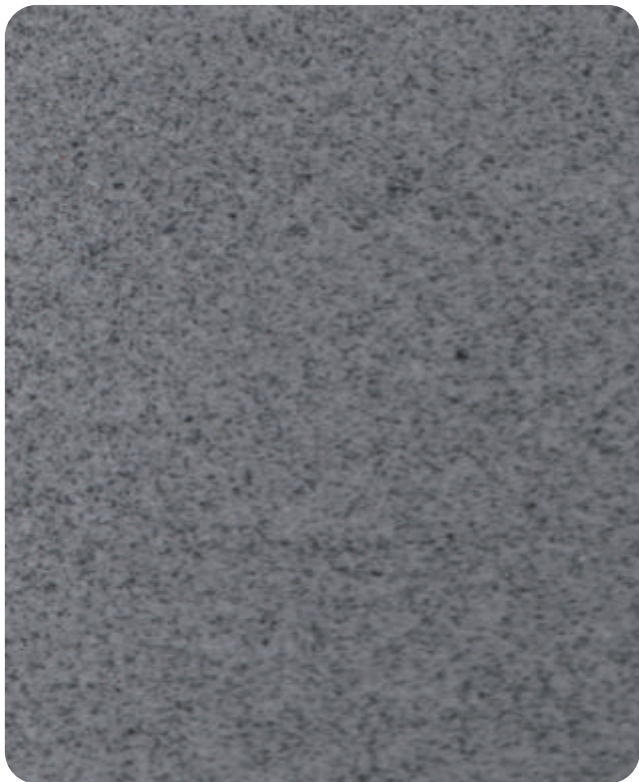

RB-725

石文化系列 9 大优势

9 MAJOR ADVANTAGES OF STONE CULTURE SERIES



施工无阻力
Construction without resistance



无接茬
There are no seams.



防返白
Preventing the return of whiteness



无流挂
There is no hanging



平滑丰满
smooth and plump



真石效果
Real stone effect



保水性强
High water retention



长保不分层
Long term protection without delamination



超低损耗
Ultra low loss



S

T

O

N

E

万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

广东省佛山市南海区松岗万石工业区

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

广州分公司

广州市荔湾区羊城装饰材料市场172号

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

△ 注意

公司根据产品技术和发展需要，有权对产品配方进行更新升级，而不对外另行公布，请以最新样板册颜色为准，不便之处，敬请原谅！

4000-147-187

www.fswanlei.com