

Resin Wall Stone 60#



Resin Wall Stone 60#

Resin Wall Stone 60# is made of selected all-natural colored rock grains of certain specifications, refined and processed, hard and not easy to wear. Compared with the traditional imitation stone paint, Resin Wall Stone 60# will pay more attention to the natural arrangement between the sand particles. Resin Wall Stone 60# will not have any tricky feeling after the scientific ratio.



01. Main Ingredients

Acrylic emulsion, natural colored stones, high-temperature calcined sand, inorganic gel, inorganic filler, purified water

02. Product Features



A. High cohesion



B. Uniform particles



C. Super weather resistance



D. Realistic stone imitation



E. Safety and environmental protection

03.Scope of application



Suitable for interior/exterior walls. Villas, hotels, entertainment venues, commercial clubs and other buildings with internal and external walls are used in parallel

04.Complementary system



Resin Wall Stone 60#



Primer



Topcoat

05.Technical parameters

Material Properties	Solvent-free (water-based)
---------------------	----------------------------

Dry film thickness	1-2mm
Drying time (surface drying)	<2h(25-27°C)
Drying time (hard)	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C, cool, dry
Net Weight	25kg
Package	
bucket size	30*30*35cm

✓ **Reference Dosage** : 2-2.5kg/m²

✓ **Tools** : finishing trowel、 wool roller



✓ finishing trowel



✓ wool roller

06. Substrate requirements

- ① The base layer should be flat, clean, free of oil, hollow, and have good strength before construction.
 - ② Renovation of old walls: level the base, remove loose surface parts, clean dust, grease and other impurities before construction.
-


07. Construction method



01. Roller apply 2 coats of primer (20% water can be added. If it is applied on a water-absorbent base surface, 50% water can be added to the first coat of primer) and cover it evenly. (can add pigment to make the same color base)



02. Add water (within 3%) and stir the main ingredients

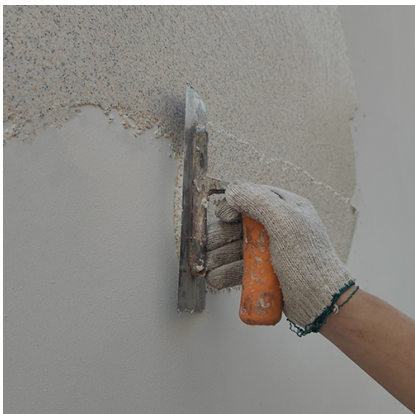

03. After applying two coats of the main material, clean up the remaining material on the surface and level the surface.



04. Apply two coats of exterior gloss/matte topcoat using a roller (you can add 15-20% water), ensuring even coverage.

08. Shelf life

12 months in a dry state at room temperature (at the time of original shipment)

09. Implementation Standard

GB/T 9779-2015 Multi-layer coatings for architecture

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10. Environmental commitment

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. Precautions

- 1、 Read the construction instructions of the package before use to get reliable and satisfactory painting effect.
 - 2、 Please effectively separate, cover and shield the area of wood products and walls.
 - 3、 Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.
 - 4、 Colour difference may exist between different batches of the same model.
-

12. Technical support

For assistance, please consult Wanlei (0757-81760676).



WeChat Official Account



WeChat mini program