


Grafiato Paint



Grafiato Paint

It is the most widely used building material, and its style still exists today. Its beautiful patterns, pure colors, thick and atmospheric texture, and delicate stone quality are incomparable.

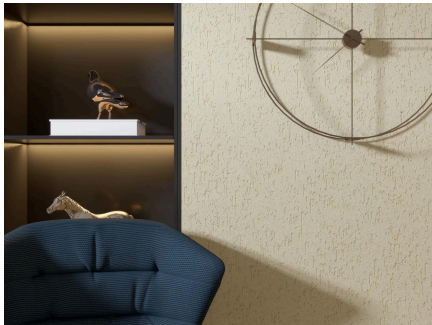

01. Main Ingredients

Nanoemulsion, selected rock particles, inorganic clay, nano calcium carbonate powder, purified water

02. Product Features



A. Three-dimensional texture: highly restore the style of natural stone, highlighting the texture.



B. Calm and natural: Sandstone particles melt into the wall, introducing a natural atmosphere.



C. Weather and stain resistance: excellent weather resistance, no fading.



D. Colorful pattern: cooperate with different construction methods to create changeable effects at will.



E. Super coverage: Thick paste paint can cover small cracks in the wall, and it is not easy to peel off.

03. Scope of application



Suitable for interior/exterior walls. Residential villas, shopping malls, hotels, entertainment venues, schools and other buildings can be used in large areas.

04. Complementary system



Grafiato Paint



Topcoat



Primer

05. Technical parameters

Material Properties	Solvent-free (water-based)
Dry film thickness	0.5-1mm
Drying time (surface drying)	<2h(25-27°C)
Drying time (hard)	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C, cool, dry
Net Weight	25kg
Package	
Package Size	30*30*35cm



Reference Dosage : 1.5-2kg/m²



Tools : wooden board, trowel, wool roller, polishing tools



wooden
board



trowel



wool roller




polishing
tools

06. Substrate requirements

- ① After the mortar base reaches a certain flatness, the bottom layer does not need to be leveled with putty powder.
 - ② The cement mortar base surface needs to be maintained for more than 6 days, and the pH is less than 11 degrees.
 - ③ When the old wall is refurbished, the base surface needs to be flat and free of cracks, shedding, bulging, dust, oil stains and dirt.
-

07. Construction method




01. Roller coat 2 coats of primer




02. Approved again Grafiato Paint



03. Scrape out the texture with a wooden scraper



04. Grinding, dust removal



05. Roller topcoat

08. *Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09. *Implementation Standard*

GB/T 9779-2015 Multi-layer coatings for architecture

10. *Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

- 1、 Read the construction instructions of the package before use to get reliable and satisfactory painting effect.
 - 2、 Please effectively separate, cover and shield the area of wood products and walls.
 - 3、 Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.
 - 4、 Colour difference may exist between different batches of the same model.
-

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).



WeChat Official Account



WeChat mini program