


Sahra Sand Texture Paint



Sahra Sand Texture Paint

It is a high-build paint prepared with natural colored sand and ceramic fine sand. The sand grains are patchwork, the surface is dry and smooth, the shape is random, and the coloring is convenient.

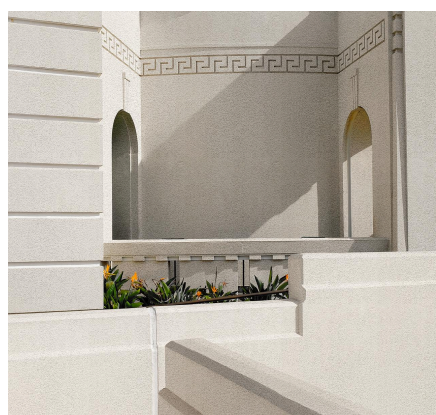

01. Main Ingredients

Nanoemulsion, selected rock particles, inorganic clay, nano calcium carbonate powder, purified water

02. Product Features



A. The sand grains are patchwork and the texture is clear



B. Strong adhesion is not easy to fall off, high hardness does not crack



C. Simple construction and strong plasticity



D. Water-based environmental protection



E. Weather and stain resistance

03. Scope of application



Suitable for interior/exterior walls. Residential villas, shopping malls, hotels, entertainment venues, schools and other buildings can be used in large areas

04. Complementary system



Sahra Sand Texture
Paint



Topcoat



Primer

05. Technical parameters

Material Properties	Solvent-free (water-based)
Dry film thickness	0.5-2mm
Drying time (surface drying)	<2h(25-27°C)
Drying time (hard)	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour >
Storage	5-35°C, cool, dry
Net Weight	25kg
Package	
Package Size	30.5*30.5*36cm



Reference Dosage： Fine: 1.5-2kg/m², Fine: 2-2.5kg/m², Medium: 3-3.5kg/m², Coarse: 4-4.5kg/m²

✓ **Tools:** trowel, wool roller, crystal art scraper



trowel



wool roller




crystal art scraper

06. Substrate requirements

- ① After the mortar base reaches a certain flatness, the bottom layer does not need to be leveled with putty powder.
- ② The cement mortar base surface needs to be maintained for more than 6 days, and the pH is less than 11 degrees.
- ③ When the old wall is refurbished, the base surface needs to be flat and free of cracks, shedding, bulging, dust, oil stains and dirt.

07. Construction method



01. Roller coat 2 coats of the same color primer



02. Batch Sahara Sand texture paint



03. Use the crystal art scraper to circle irregularly and rub evenly to make the particles smooth



04. After drying, roller topcoat

08. Shelf life

12 months in a dry state at room temperature (at the time of original shipment)

09. 执行标准 / Implementation Standard

GB/T 9779-2015 Multi-layer coatings for architecture

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10. Environmental commitment

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. Precautions

- 1、 Read the construction instructions of the package before use to get reliable and satisfactory painting effect.
 - 2、 Please effectively separate, cover and shield the area of wood products and walls.
 - 3、 Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.
 - 4、 Colour difference may exist between different batches of the same model.
-

12. Technical support

For assistance, please consult Wanlei (0757-81760676).



WeChat Official Account



WeChat mini program