



Gamazine Paint

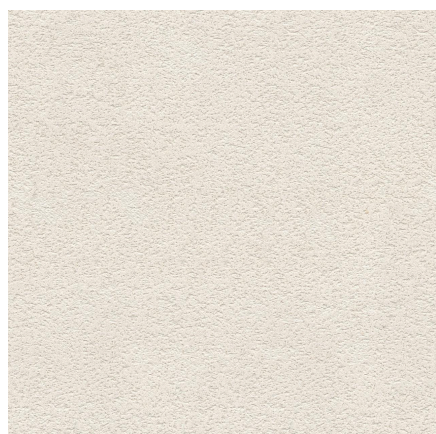

Gamazine Paint

Gamazine Paint (RY type), carefully selected every rock particle, every full grain of sand has a unique brilliance, crowned with a unique flowing water pattern. With its soft and elegant colors, "Vanlei" highlights the uniqueness of the walls of the living room while pursuing the overall aesthetic feeling.

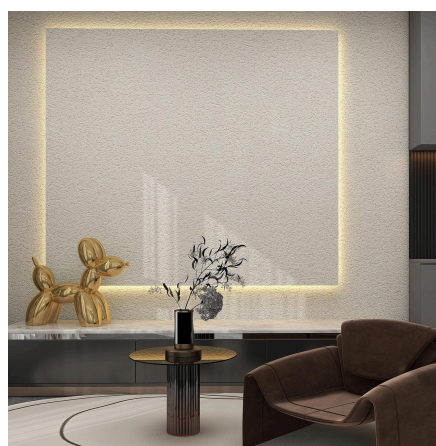

01. Main Ingredients

Nanoemulsion, selected rock particles, inorganic clay, nano calcium carbonate powder, purified water

02. Product Features



A. Selected rock particles, the particles are full like gold



B. Natural color, flexible and thick material



C. A variety of art styles, choose as you like



D. No seams, no harmful substances, strong waterproof and stain resistance

03.Scope of application



Suitable for interior/exterior walls. European and American art style, suitable for interior and exterior walls (high-end banquet halls, commercial hotels, lobbies, villas)

04.Complementary system



Gamazine Paint



Topcoat



Primer

05.Technical parameters

Material Properties	Solvent-free (water-based)
Dry film thickness	0.5-1mm
Drying time (surface drying)	<2h(25-27°C)
Drying time (hard)	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C, cool, dry
Net Weight	25kg
Package	
Package Size	30*30*35cm



Reference Dosage : 1.5-2kg/m²



Tools : finishing trowel、 wool roller、 acrylic washboard、 polishing tools



finishing



wool roller



acrylic




polishing

06. Substrate requirements

- ① Water-resistant putty powder must be used, and the surface is smooth without falling off or falling off.
 - ② (slight) when powder falls: roller coat inorganic curing solution (10-20% water) once, and then apply after 12 hours.
-

07. Construction method




01. Roller coat primer 2 times, the base layer must be completely closed




02. Scrape the main material twice with a batch knife



03. Use an acrylic washboard to rub it in irregular circles, and then use an acrylic washboard to rub it in circles to get the texture when it is half dry



04. After drying, sand it with 320-grit sandpaper and remove dust



05. Roller topcoat

08. Shelf life

12 months in a dry state at room temperature (at the time of original shipment)

09.Implementation Standard

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10.Environmental commitment

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11.Precautions

- 1、 Read the construction instructions of the package before use to get reliable and satisfactory painting effect.
 - 2、 Please effectively separate, cover and shield the area of wood products and walls.
 - 3、 Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.
 - 4、 Colour difference may exist between different batches of the same model.
-

12.Technical support

For assistance, please consult Wanlei (0757-81760676).



WeChat Official Account



WeChat mini program