


Suedep

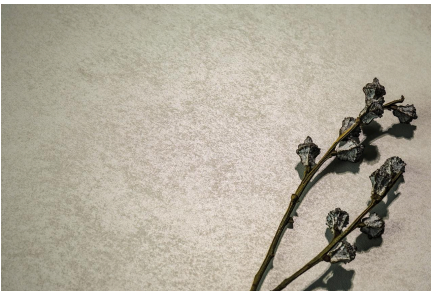

Suedep

Suedep, with its texture, emphasizes the luxurious touch of top-grade suede. Its surface boasts short, dense, and abundant nap, providing a reassuringly warm and comforting feel. Over time and with repeated touch, it develops subtle variations in color depth due to different light refractions—a unique "warmth mark."

This is not wear and tear, but rather a life imprint, like the patina of leather, recording the touch of the hands and the sedimentation of time. It transforms the home into a warm, living entity that breathes and evolves.

01. Main Ingredients

Odorless acrylic emulsion, water, nano-sized glass beads, titanium dioxide, cellulose

02. Product Features



A. Appearance resembling a light mist, with a soft touch and diffused light reflection



B. Skin-friendly texture: Soft pearl luster, with a delicate, velvety feel



C. Easy to maintain - waterproof and mildew-resistant design



D. Near-zero VOC, low-VOC formula



E. Can be applied over large areas: Seamless, with minimal color variation



F. Continuous scratch resistance: Excellent, long-lasting, and stable molecular cross-linking technology, providing superior crack resistance and weather resistance

03.Scope of application



Exterior walls are not applicable.




Suitable for interior walls. Ideal for wall decoration, especially for large areas.

04.Complementary system



Texture white primer

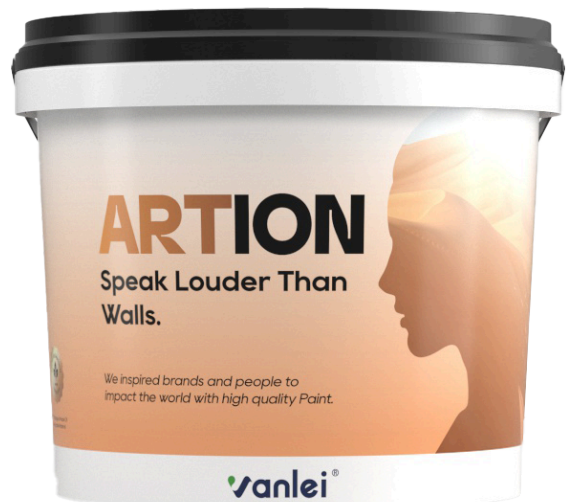

Suedep

05. Technical parameters

Material Properties	Solvent-free (water-based)
Dry film thickness	0.05-0.06mm
Drying time (surface drying)	2h< (25-30°C)
Drying time (hard)	>72h (25-30°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C, cool, dry
Net Weight	5kg
Package	
bucket size	22*22*22cm

✓ **Reference Dosage** : 5-6m²/kg/2 coats

✓ **Tools** : wool roller、 paint brush



wool roller



paint brush

06. Substrate requirements

- ① New walls: remove surface dust, grease and loose plaster. Repair any holes and cracks. The wall must be sound, clean, dry and even.
 - ② Recoat walls: remove loose or unsound paint film, clean off dust and chalking residues, fill, level and sand. The wall must be sound, clean, dry and even.
 - ③ Before priming, substrate surface moisture should be less than 10% and pH value less than 10.
 - ④ To ensure optimal wall coating results, using a primer is strongly recommended.
 - ⑤ Because the main material layer is relatively thin, roll the substrate as smoothly as possible during preparation to enhance the smooth hand-feel of the main material.
-

07. Construction method



01. Apply two coats of Texture white primer (with 20-25% water added), with an interval of 4-6 hours between coats.



02. Use a paint brush to apply Suedep irregularly in one coat (15–20% water can be added). Apply a thin coat as the main approach, and smooth out the brush marks again while it is semi-dry. After it dries completely for 8–10 hours, repeat once.

08. *Shelf life*

24 months in a dry state at room temperature (at the time of original shipment)

09. *Implementation Standard*

GB 30981.1-2025 Limit of harmful substances of coatings—Part 1: Architectural coatings

10. *Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

- 1、 Read the construction instructions of the package before use to get reliable and satisfactory painting effect.
- 2、 Please effectively separate, cover and shield the area of wood products and walls.
- 3、 Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.
- 4、 Colour difference may exist between different batches of the same model.

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).



WeChat Official Account



WeChat mini program