
Sharon Sweeping Sand





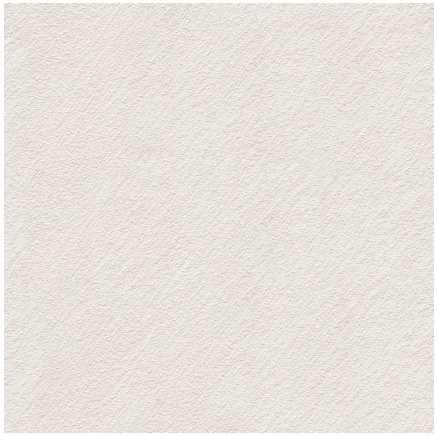

Sharon Sweeping Sand

Vanlei is used to creating new products. The new Sharon Sweeping Sand is made of selected high-quality raw materials through innovative technology and processes. It has a pure and pollution-free olfactory sense with 0 odor and is a pure ecological product. It can produce a pearlescent luster and change its appearance according to the refraction of light. The pearlescent effect on the surface is more dazzling under the adjustment of professional lighting.

01.*Main Ingredients*

100% acrylic resin, micron-grade fluff powder, pearl powder, nano calcium carbonate powder, purified water

02.*Product Features*

Exquisite touch, natural smoothness, natural good effect

Clear sand texture, transparent and soft color

Pearl luster, soft and not dazzling

Super environmental protection: Innovative sterilization technology using "IPS new polymer synthesis process"

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. Interior walls in children's rooms, living rooms, and other residential spaces, as well as commercial spaces.

04. *Complementary system*








✅ Sharon Sweeping Sand

✅ primer

✅ topcoat

05. *Technical parameters*

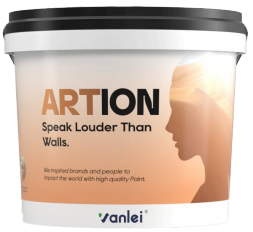Material Properties	Solvent-free (water-based)
Dry film thickness	0.2-0.3mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>24h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C， cool， dry
Net Weight	5kg
Package	
bucket size	22*22*22cm

✅ ***Reference Dosage***：4-5㎡/kg

✅ ***Tools***：wool roller、thick chip brush





✅ wool roller ✅ thick chip brush

06.*Substrate requirements*


① The cement mortar base needs to be maintained for more than 6 days, and the PH is less than 11 degrees

② Neutral putty can be directly constructed after leveling, grinding, and dust removal

③ The mortar base needs to be leveled and polished with putty powder, and the alkaline putty needs to be maintained for about 15 days

④ When renovating old walls, the surface should be smooth, free of cracks, peeling, bulging, dust, and oil stains

07.*Construction method*

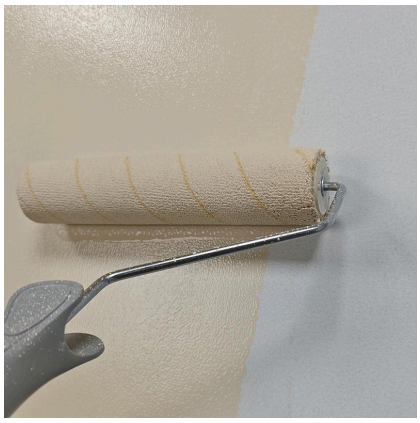

01.Roll on two coats of the same color primer (can add 20% water) to ensure even coverage. Allow it to dry for 8-12 hours before proceeding to the next step.



02.Mix Sharon Sweeping Sand with the pigment according to the color card ratio (can add 20% water). Stir for about ten minutes until evenly mixed.



03.Roll on the first coat of Sharon Sweeping Sand.



04.Before it dries, use a brush to sweep in an irregular S shape to create a texture. Wait for 8-12 hours to dry before proceeding to the next step.



05.Roll on the second coat of Sharon Sweeping Sand, and follow the previous step to sweep out the patterns.

08.*Shelf life*

24 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB 18582-2020 Limit of harmful substances of architectural wall coatings

---

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program