
Copper rust





Copper rust

The rust mottled shows not only the shocking visual effect, but also the heavy sense of the times behind the material. Wanlei Copper/Rust Paint FU type quickly achieves this oxidation effect within a limited time, and incorporates a strong atmosphere of artistic creation, as if touching the vicissitudes of history and the ages.

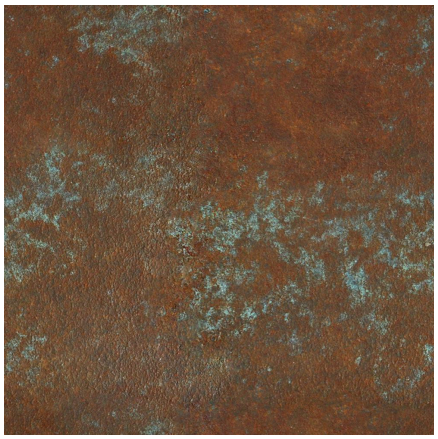

01.*Main Ingredients*

Nanoemulsion, selected copper powder/iron powder, imported cellulose, purified water

02.*Product Features*

A. The "rust process" can be displayed in a short time

B. Metal material, strong metal color

C. The process is random, and the rust can be freely matched

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. Antique relief gardens, shopping malls, bars, KTV, cafe chain store props, old building repairs, museums, luxury hotels, clubs, villas and other indoor architectural decoration. Partial decoration: partial embellishment of lamp pools, furniture surfaces, columns, beams, handicraft surfaces, etc.

04. *Complementary system*





✅ Copper rust

✅ Special primer





✅ Special topcoat

✅ oxidizing agent

05. *Technical parameters*

Material Properties	Solvent-free (water-based)
Dry film thickness	0.2-0.5mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>24h(25-27°C)
Coating layer	2 times
Service life	> 5 years
Paint color	Copper rust, rust
Storage	<30°C， cool， dry
Net Weight	Patina: 4kg, Rust: 6kg
Package	

	
bucket size	20*20*19cm

✅ ***Reference Dosage***：2-3㎡/kg

✅ ***Tools***：wool roller、natural wool sea sponge



✅ wool roller




✅ natural wool sea sponge

06.*Substrate requirements*

① Water-resistant putty powder must be used, and the surface is smooth without falling off or falling off.

② (Slight) When powder falls: Roller coat Vanlei anti-alkali primer (mixed with water 10-20%) once, and then apply after 12 hours.

07.*Construction method*

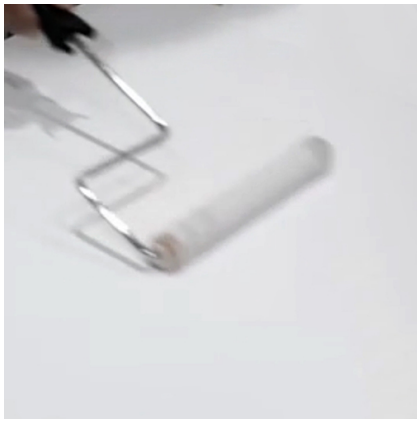

01.Roller or spray special primer 1-2 times, and dry thoroughly.



02.Roll on two coats of Copper rust.



03.The Copper rust effect needs to be sprayed (or rolled) with the catalytic solution at 70% dryness, while the rust effect can be coated with the catalytic solution after drying or the next day.



04.Slightly sand after drying, and roll the topcoat.

08.*Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09. *Implementation Standard*

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10. *Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

5、Avoid contact with eyes, wash your hands after use, and wear a mask when spraying or grinding.

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program