
Pearlescent sparkle paint





Pearlescent sparkle paint

The "Vanlei Pearlescent sparkle paint" is equipped with a denser, more concentrated pearlescent powder that changes appearance according to the refraction of light, helping to increase the overall brightness of the space.

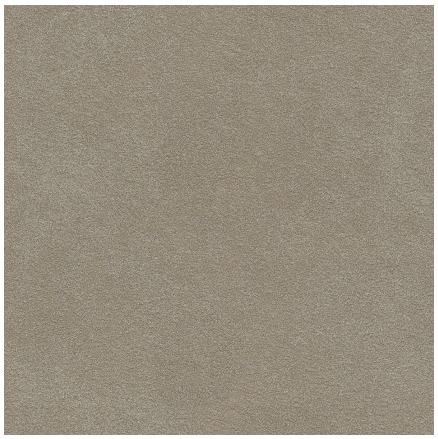

01.*Main Ingredients*

Deodorant lotion, calcined kaolin, pearl powder, cellulose, purified water

02.*Product Features*

A. The quicksand texture is clear, the color is transparent and soft

B. Pearl luster, stronger two-color texture

C. Ultra-high hardness, high scrub resistance

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. European style such as: high-end European-style banquet hall, hotel lobby, elegant villas, luxurious boutiques, etc.

04. *Complementary system*





✅ Pearlescent sparkle paint

✅ primer

05. *Technical parameters*

Material Properties	Solvent-free (water-based)

Dry film thickness	0.2-0.3mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour >
Storage	5-35°C， cool， dry
Net Weight	5kg
Package	
bucket size	20*20*19cm

✅ ***Reference Dosage***： 3㎡/kg/2 times

✅ ***Tools***： wool roller, thick chip brush





✅ wool roller ✅ thick chip brush

06.*Substrate requirements*

① After the mortar base reaches a certain flatness, the bottom layer does not need to be leveled with putty powder

② The cement mortar base surface needs to be maintained for more than 6 days, and the pH is less than 11 degrees


③ When the old wall is refurbished, the base surface needs to be flat and free of cracks, shedding, bulging, dust, oil stains and dirt

07.*Construction method*

Online Construction Video ➤



01.Roll the primer once, after drying, hang the net and roll the primer

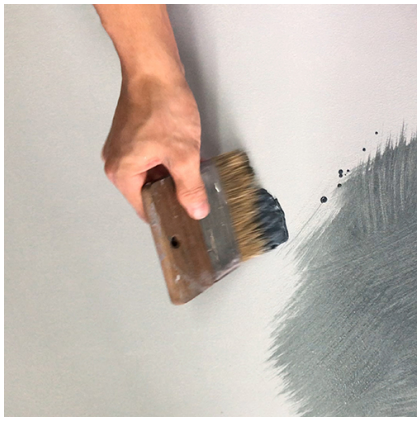

02.Scrape twice with coarse sand, with an interval of 24 hours between the two times, and smooth it with 180-grit sandpaper after drying

03.Scrape twice with medium (fine) sand. In this step, you can make the texture you want. There is an interval of 24 hours



between the two times. After drying, sand it with 180-grit sandpaper to increase the feel



04.Roll on two coats of primer. After 6 hours between two times, after drying, sand the surface with 240 grit sandpaper

---

08.*Shelf life*

24 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB 18582-2020 Limit of harmful substances of architectural wall coatings

---

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11.*Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program