
Crystal-Velvet





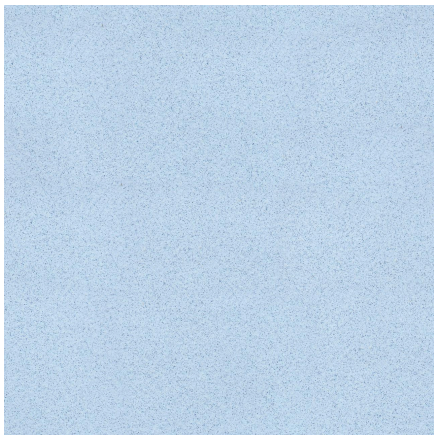

Crystal-Velvet

Crystal-Velvet is an art paint developed by Wan Lei with great concentration. It inherits the colorful suede effect of interior wall art paint, and has super high scrubbing resistance and stain resistance. It is more distinctive in the creation of visual effects. It adopts gradient color system, simple construction method, and combines novel construction tools to bring a high-efficiency lifestyle.

01.*Main Ingredients*

Purified water, 100% silicone acrylic emulsion, special silicate, calcined kaolin, calcium carbonate powder, titanium dioxide

02.*Product Features*

A. Colorful velvet effect

B. Extremely high washability

C. Stain and dirt resistant

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. Large-scale engineering projects, villas, hotels, entertainment venues, commercial clubs and other interior wall building spraying

04. *Complementary system*








✅ Crystal-Velvet ✅ Crystal-Velvet-B ✅ Primer

05. *Technical parameters*

Material Properties	Solvent-free (water-based)
Dry film thickness	0.1-0.2mm

Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>72h(25-27°C)
Coating layer	1 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C， cool， dry
Net Weight	5kg
Package	
bucket size	23*23*22cm

✅ ***Reference Dosage***：3-3.5㎡/kg

✅ ***Tools***：electric spray gun、wool roller





✅ electric spray gun ✅ wool roller

06.*Substrate requirements*


① It is recommended to use high-quality water-resistant putty powder as the leveling material.

② The base layer should be flat, clean and have good strength before construction.

③ Renovation of old walls: level the base, remove loose surface parts, clean dust, grease and other impurities before construction.

④ Supporting primer: When the putty has slight powder loss, it is recommended to use Wanlei's exclusive matching primer after polishing.

07.*Construction method*

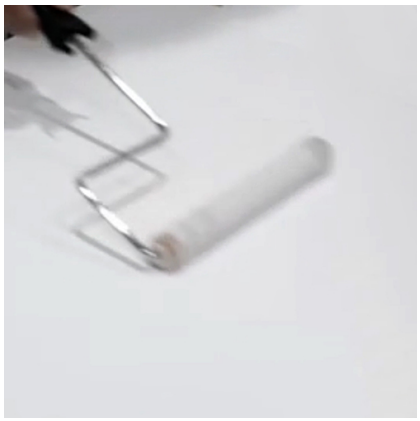

01.Roller coat the same color primer 2 times(you can add 15-20% water in moderation)



02.Mix components A and B at a ratio of 5 kg : 0.25 kg. Water may be added at up to 10%



03.Apply one coat of Crystal-Velvet by spray

08.*Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB 30981.1-2025 Limit of harmful substances of coatings—Part 1: Architectural coatings

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11.注意事项 / *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

5、Avoid contact with eyes, wash your hands after use, and wear a mask when spraying or grinding.

6、Do not mix the main material of A, the overall color is determined by the primer and B component.

12.*Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program