Concrete Paint







Concrete Paint

Concrete Paint abandons chemical products such as coatings and finishes. It is formed at one time, which is conducive to environmental protection, reduces a lot of construction waste, and is conducive to protecting the environment. Fair-faced concrete has a simple, natural and calm appearance, and returns to nature. More and more architects in the world adopt the fair-faced concrete process. They think that this is a kind of noble simplicity, which seems simple, but has more artistic effect than resplendent and magnificent.

01.*Main Ingredients*

Portland special cement, high-quality white carbon black, nano calcium carbonate powder, kaolin, etc.

02.*Product Features*

A. Once formed, the finish is smooth and delicate

B. Mineral raw material composition, the material is environmentally friendly and pollution-free

C. Simple process, saving time, material and labor

D. Thick industrial style

E. Simple, natural and calm, returning to the original appearance

03.*Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. Batch interior wall decoration area: background wall

04.*Complementary system*





✅ Concrete Paint

✅ Primer

---

05. *Technical parameters*

Material Properties	Powder coating
Dry film thickness	1-1.5mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C， cool， dry
Net Weight	20kg
Package	
bucket size	69*35*10cm

✅ ***Reference Dosage***：1-2kg/㎡（1-2 time）

✅ ***Tools***：finishing trowel, wool roller





✅ finishing trowel

✅ wool roller

06.*Substrate requirements*

① Water-resistant putty powder must be used, and the surface is smooth without falling off or falling off.


② (Slight) When the powder falls: Roller coat inorganic curing solution (10-20% with water) once, and then apply after 12 hours.


07.*Construction method*



01.Roller coat primer 2 times, let it dry

02.Flat batch (thin batch does not show through the bottom) Concrete Paint again

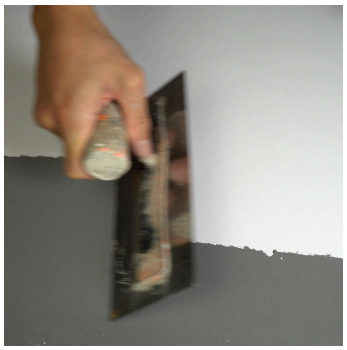

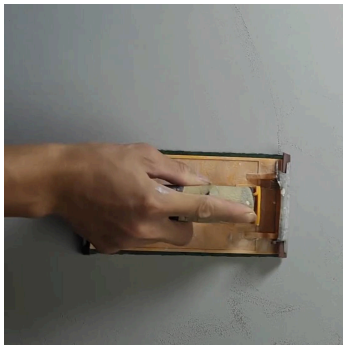

03.After drying, sand with 240-grit sandpaper to remove dust



04.Use a batch knife to irregularly move the short knife to batch (stack batches) Concrete Paint, remove excess materials while pointing, and collect irregularly



05.Surface dry and then finish

08.*Shelf life*

6 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

JC/T 1024-2019 Decorative render and plaster for wall

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

---

11. *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

---

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program