
Metallic Sparkle Paint





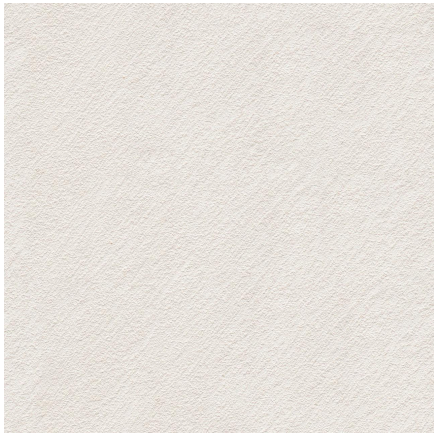

Metallic Sparkle Paint

Metallic Sparkle Paint is equipped with sand powder with higher density, which improves the blackening of the surface of traditional gold sand. It can produce pearlescent luster and change its appearance according to the refraction of light. The pearlescent effect on the surface is more dazzling under the adjustment of professional lighting, which helps to improve the overall brightness of the space.

01.*Main Ingredients*

Nanoemulsion, pearl powder, fine stone particles, cellulose, purified water

02.*Product Features*

A. The quicksand texture is clear, the color is transparent and soft

B. Pearl luster, stronger two-color texture

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. European style such as: such as high-end European-style banquet halls, hotel lobbies, elegant villas, luxurious boutiques, etc.

04. *Complementary system*



✅ Metallic Sparkle Paint



✅ Primer



✅ Topcoat

05. *Technical parameters*

Material Properties	Solvent-free (water-based)
Dry film thickness	0.2-0.3mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>72h(25-27°C)
Coating layer	2 times

Service life	> 10 years
Storage	Multicolour >
Paint color	5-35℃， cool， dry
Net Weight	4kg
Package	
Package Size	20*20*19cm

✅ ***Reference Dosage***：4-5㎡/kg

✅ ***Tools***：wool roller、thick chip brush





✅ wool roller ✅ thick chip brush

06.*Substrate requirements*

① Water-resistant putty powder must be used, and the surface is smooth without falling off or falling off.

② (Slight) When powder falls: Roller coat Vanlei anti-alkali primer (mixed with water 10-20%) once, and then apply after 12 hours.

07.*Construction method*



01.Roll and apply topcoat twice



02.Add 15-25% water and color paste to the main material and mix evenly



03.Dip the material with a thick chip brush and brush twice to create the texture

08.*Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

---

11. *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

---

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program