Marmora Paint





Marmora Paint

Marmora Paint is a water-based coating made from special high-polymer waterproof resin. It only requires application with a finishing trowel, eliminating the need for spraying and preventing splatter pollution. Additionally, Vanlei Glamour paint is an environmentally friendly water-based paint primarily composed of resin and various colored flakes of natural stone powder. This gives it excellent flexibility and prevents issues related to thermal expansion and contraction.

01.*Main Ingredients*

Nano acrylic emulsion, selected colored flake stones, nano calcium carbonate powder, titanium dioxide, purified water

02.*Product Features*

A. Waterproof effect, 0 color difference

B. High ductility, 100% stable and uniform scraping performance

C. Acid and alkali resistance

D. Wear-resistant and stain-resistant, easy to maintain daily

E. Excellent 30-year weather resistance

F. Anti-UV, stable color

03. *Scope of application*

✅ Suitable for both indoor and outdoor use. Can be used for wall decoration, and in limited areas of the floor (only as a decorative layer).

04. *Complementary system*





✅ Marmora Paint

✅ Primer





✅ Polyurethane topcoat - 2 component：A

✅ Polyurethane topcoat - 2 component：B

05. *Technical parameters*

Material Properties	Organic (slurry)
Dry film thickness	0.8-1mm
Drying time （surface drying）	＜2h(25-30°C)
Drying time （hard）	24-48h(25-30°C)
Coating layer	2 times
Service life	> 20 years
Paint color	Multicolour
Storage	5-35°C， cool， dry
Net Weight	25kg
Package	
Package Size	30*30*35cm

✅ **参考用量 / *Reference Dosage*：**

Base Coat: 0.5–0.6 kg/m^2 (1 coat)

Effect Coat: 0.8–0.9 kg/m^2 (1 coat)

Total: 1.3–1.5 kg/m^2 (2 coats)

✅ ***Tools*：** finishing trowel, wool roller, polishing tools







✅ finishing trowel ✅ wool roller ✅ polishing tools

06.*Substrate requirements*

Base surface treatment

① It is recommended to use high-quality water-resistant putty powder as leveling material.

② The base layer should be flat, clean, free of oil, hollow, and have good strength before construction

③ Renovation of old walls: level the base, remove loose surface parts, clean dust, grease and other impurities before construction.

④ Matching primer: When the putty is slightly powdery, it is recommended to use Vanlei's exclusive matching primer after sanding.

Substrate Preparation Requirements


① Marmora Paint's main coating is relatively thin, requiring a high standard of substrate flatness. To ensure a smooth and even finished surface, the substrate (if conditions are limited) must be thoroughly leveled, preferably using self-leveling compound first.

② Recommended Optimized Process: First, apply two coats of Vanlei micro-cement coarse sand to level the substrate, then apply the Marmora Paint main coating. This will result in the best finish. This step can be omitted if the wall surface is flat.


07.*Construction method*



01.Apply 1–2 coats of primer by roller (Super Grip Primer, Sealing Primer, or Texture White Primer) (15–20% water can be added)

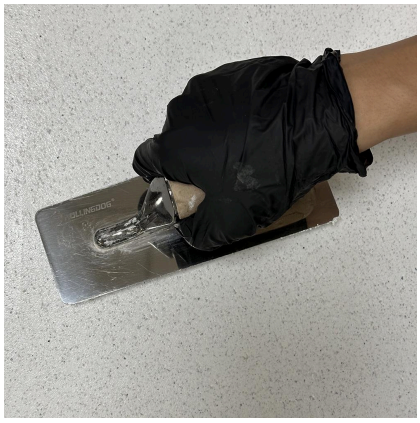

02.After mixing the main material with pigment, add 2–3% water to adjust the viscosity. Apply one skim coat, controlling the thickness below 1 mm. Allow 8–12 hours to dry.

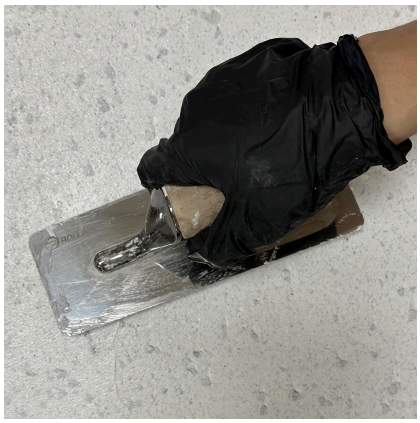

03.For the second skim coat: mix the decorative flakes evenly into the material, then apply a full skim coat and smooth the surface with a trowel. The mixture must be used within 2 hours.



04.After drying, sand with 180–320 grit sandpaper and remove dust.



05.Apply Polyurethane Topcoat - 2 Component by roller 2–3 times (10–15% water can be added).

08.*Shelf life*

18 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB/T 9779-2015 Multi-layer coatings for architecture

GB 30981.1-2025 Limit of harmful substances of coatings—Part 1: Architectural coatings

---

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11.*Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

---

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program