Marmorino



Marmorino

Vanlei Marmorino presents the aesthetic effect of noble "marble" with a uniform surface through soft and vibrant tones, this material is widely used in Europe in the 12th century. With a long history, Marmorino skillfully integrates art into architectural design.



Marmorino is developed from mineral lime, marble powder natural colors and inorganic fillers. This selection of natural raw materials (mineral lime-based finish) endows Vale Mamanu with a high ecological value: the dispersion of humidity naturally prevents the growth of mold and bacteria, without the need for additional chemical additives.

Today's colors and marble textures, modernized for today's designs without losing traditional expression.

01.*Main Ingredients*

Fully blended slaked lime, fine marble powder, inorganic pigment/filler, nano calcium carbonate powder

02.*Product Features*

A. Adhesive properties: water-based vinyl multifunctional copolymer

B. The maximum thickness of the lightweight surface is 2mm

C. A1 fireproof characteristics, non-flammable

D. Lime quality, natural, high hardness

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. Suitable for walls and ceilings, it has no seams for easy cleaning and maintenance

04. *Complementary system*



✅ Marmorino



✅ Topcoat



✅ Primer

05. *Technical parameters*

Material Properties	Powder coating
Dry film thickness	1-1.5mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	5-35°C， cool， dry
Net Weight	20kg
Package	
Package Size	69X35X10cm

✅ ***Reference Dosage***： 1-1.5kg/㎡

✅ ***Tools***： trowel、wool roller、polishing tools







✅ trowel ✅ wool roller ✅ polishing tools

06.*Substrate requirements*

① The base layer should be flat, clean, free of oil, hollow, and have good strength before construction.

② Renovation of old walls: level the base, remove loose surface parts, clean dust, grease and other impurities before construction.

③ The substrate must be completely dry and free from dust and salt. If necessary, resurface or reinforce the surface with specific products.

07.*Construction method*



01.Roll the primer (you can add about 30% water) 1~2 times to evenly cover the surface



02.Add water according to the ratio (20kg:10kg) and mix well.

Apply Marmorino evenly.



03.After drying, sand with 320 grit sandpaper to remove dust




04.Apply Marmorino at irregular points, and collect as you go to ensure that the material is evenly applied to the wall to avoid knife marks and color differences.



05.Wait until it is half dry, and then smooth out the irregular polishing to eliminate obvious knife marks.



06.Wait until it is 70% dry, and then perform irregular finishing and flattening again.

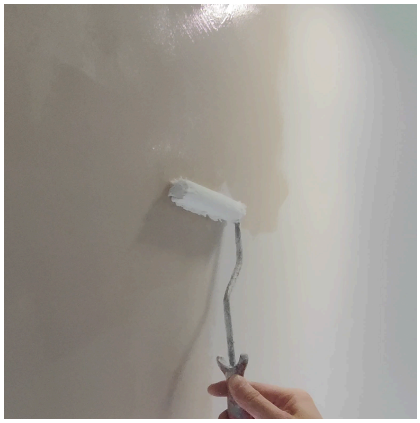

07.Roller-applied seamless topcoat

08.*Shelf life*

6 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

JG/T 445-2014 Architectural inorganic powder coatings

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11.*Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program