
Lime Stone Paint II



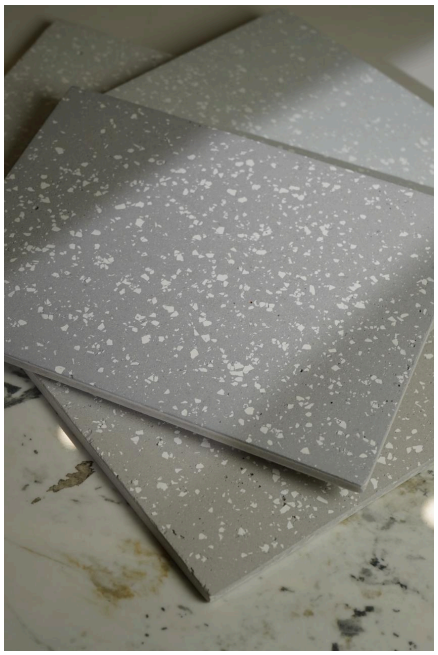

Lime Stone Paint II

Core Essence: Natural Stone, Liquid Rebirth
We return to rock’ s true nature—sourced from Earth’ s million-year-old mineral treasures (mineral lime and marble powder)—and through innovative processing, distill and activate that essence into flowing “liquid stone.” We reject any unnatural additives or fillers, focusing purely on restoring the stone’ s authentic texture, color, and ecological character. Here, the very soul of stone is reborn.

Pure Origins：Rooted in natural limestone deposits, **Lime Stone Paint II** selects only the core ingredients—slaked lime, finely milled marble powder, inorganic pigments and fillers, and nano-calcium carbonate—without a trace of synthetic chemicals. It delivers 100% of the Earth’ s original hues and textures, a pure expression of rock’ s essence. Inspired by nature, made entirely from natural materials.

01.*Main Ingredients*

Fully mixed slaked lime, fine marble powder, inorganic pigments/fillers, nano calcium carbonate powder

02.*Product Features*

A. Pure natural material, 0 additives, 0 admixtures, 100% original color

B. 29° glaze soft luster, warm stone

C. Exclusive material, exclusive natural chamfer texture, pure French stone texture

D. Smooth feel, cold texture

E. The whole body is made of liquid stone with a cold texture

03. *Scope of application*

✅ Suitable for interior/exterior walls.

04. *Complementary system*



✅ Lime Stone Paint II



✅ Primer



✅ Seamless topcoat

05. *Technical parameters*

Material Properties	Solvent-free (water-based)
Dry film thickness	1-2mm
Drying time （surface drying）	>2h(25-27°C)
Drying time （hard）	>24h(25-27°C)
Coating layer	2 times
Service life	⩾30 years
Paint color	Multicolour
Storage	5-35°C， cool， dry
Net Weight	25kg
Package	
bucket size	30*30*35cm

✅ ***Reference Dosage***： 3-3.5kg/㎡/2 times

✅ ***Tools***： wool roller, finishing trowel, polishing tools







✅ wool roller ✅ finishing trowel ✅ polishing tools

06.*Substrate requirements*

① The base must be flat, clean, free of oil, grime, and hollows, and possess good strength before construction.


② Renovating an old wall: Level the base, remove loose surface areas, and clean away dust, oil, and other impurities before construction.

③ The base must be completely dry and free of dust and salt. If necessary, resurface or reinforce the surface using specific products.

07.*Construction method*



01.Roll and apply two coats of penetrating primer (add 10-15% water)

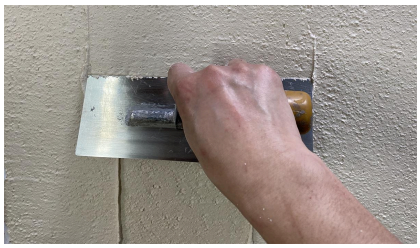

02.Apply a layer of Vanlei Lime Stone Paint II main material with finishing trowel (2-3% water can be added)



03.After drying, use 80# sandpaper to polish or scrape off the difficult areas with a spatula until it is smooth and then remove the dust.



04.The second coat is applied irregularly, leveled, and then allowed to dry naturally before entering the polishing process.



05.After drying, first use 80-grit sandpaper to smooth it, then use 180-grit, then use 320-grit, and clean it up



06.Use Interior seamless topcoat (add 15-20% water) and roll it evenly twice



07.After the topcoat is completely dry, use 320-grit polishing sandpaper to remove burrs and increase the feel

---

08.*Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB/T 18582-2020 Limit of harmful substances of architectural wall coatings

---

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11.*Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect

2、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed

3、Before using the main material, please stir it thoroughly

4、Please effectively separate, cover and shield the area between the wood products and the wall

5、The raw materials of the product are pure natural mineral stones from nature. There will be color differences between different batches of materials; there will be color differences between different batches of products of the same model

6、The product should not be darkened. Different base water absorption rates will affect the surface color

7、Limited by the alkaline material of lime, the longer the storage time between each batch of products, the lighter the color will be. This is a normal phenomenon

8、Pay attention to appropriately extend the drying time during winter construction to meet the polishing requirements

---

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program