
Bianco Carrara



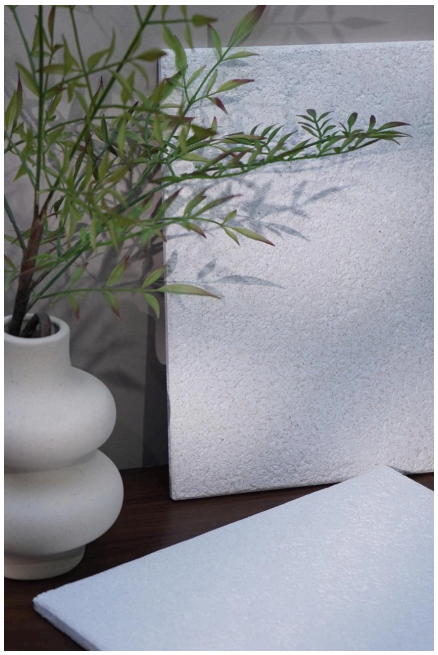

Bianco Carrara

Bianco Carrara is inspired by Italian white travertine, renowned for its use in medieval structures such as the Roman Colosseum; with abundant reserves in Turkey, that country has become one of the main modern suppliers. Its natural character emphasizes primordial, rugged, unworked textures, featuring distinctive pitting and layered veining, which makes it a striking choice for inorganic artistic coatings. Rather than being seen merely as a handcrafted decorative finish, it should be understood as a form of artistic expression.

01. *Main Ingredients*

Fully mixed slaked lime, marble powder, quartz sand, inorganic pigments/fillers

02. *Product Features*

A. Durable, wear- and scratch-resistant

B. Excellent moisture resistance

C. A1 fire classification — non-combustible

D. Fast renewal, high hiding power, excellent at covering existing substrates

E. 100% natural

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Interior wall applicable. Suitable for large-area indoor coating.

04. *Complementary system*





✅ Bianco Carrara

✅ Plaster Base





✅ Primer

✅ Seamless topcoat

---

05. *Technical parameters*

Material Properties	Solvent-free (water-based)
Dry film thickness	2-2.5mm
Drying time （surface drying）	<2h(25-27°C)
Drying time （hard）	>24h(25-27°C)
Coating layer	1 times
Service life	⩾20 years
Paint color	Multicolour >  
Storage	5-35°C， cool， dry
Net Weight	25kg

Package	
Bucket size	30*30*35cm

✅ ***Reference Dosage***： 2.8-3.3kg/㎡/1 pass

✅ ***Tools***： wool roller, finishing trowel, polishing tools







✅ wool roller ✅ finishing trowel ✅ polishing tools

06.*Substrate requirements*

① The base must be flat, clean, free of oil, grime, and hollows, and possess good strength before construction.


② Renovating an old wall: Level the base, remove loose surface areas, and clean away dust, oil, and other impurities before construction.

③ The base must be completely dry and free of dust and salt. If necessary, resurface or reinforce the surface using specific products.


07. *Construction method*



01.Roll two coats of Texture White Primer (dilute with 20–25% water).

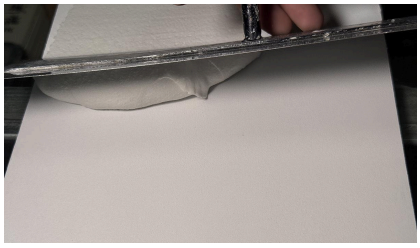

02.Apply one layer of same-color Plaster Base with a stainless-steel trowel (mixing ratio Plaster Base : water = 20 kg : 6–7 kg).

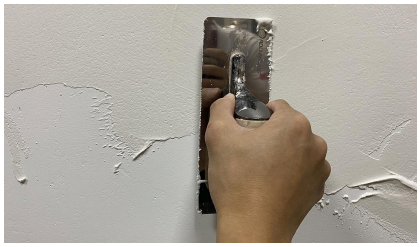

03.Apply an even trowel coat of Bianco Carrara (dilute with 3–5% water); while applying, gently tap with the trowel to create a honeycomb texture.



04.When half-dry, compress and level the surface; wait 12–24 hours until fully dry before proceeding.



05.After drying, sand with 80-grit sandpaper until natural pores appear, then remove dust.



06.Roll two even coats of Seamless Topcoat (add 15–20% water).

08. *Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09. *Implementation Standard*

GB 30981.1-2025 Limit of harmful substances of coatings—Part 1: Architectural coatings

10. *Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect

2、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed

3、Before using the main material, please stir it thoroughly

4、Please effectively separate, cover and shield the area between the wood products and the wall

5、The raw materials of the product are pure natural mineral stones from nature. There will be color differences between different batches of materials; there will be color differences between different batches of products of the same model

6、The product should not be darkened. Different base water absorption rates will affect the surface color

7、Limited by the alkaline material of lime, the longer the storage time between each batch of products, the lighter the color will be. This is a normal phenomenon

8、Pay attention to appropriately extend the drying time during winter construction to meet the polishing requirements

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program