
Velvet-II





Velvet-II

Velvet-II, the delicate and silky touch is amazing, and the ultimate effect brings a gorgeous feeling. It has a beautiful velvet cloth-like effect, which is especially suitable for interior decoration. Using it will bring you a novel, unique, elegant and quiet living environment.

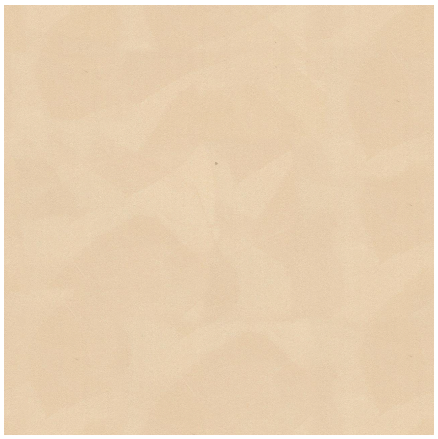

01.*Main Ingredients*

Inorganic soil, quartz sand, inorganic pigments and fillers, marble powder

02.*Product Features*

A. Seamless coating, no harmful substances

B. Pearly and elegant, with a unique fluffy texture

C. The solid content is about 50%

03. *Scope of application*

❌ Exterior walls are not applicable.

✅ Suitable for interior walls. High-end banquet halls, luxury boutiques, high-end villas, hotels, etc.

04. *Complementary system*






✅ Velvet-II

✅ Primer

05. *Technical parameters*

Material Properties	Solvent-free (water-based)
Dry film thickness	0.1-0.2mm
Drying time （surface drying）	<2h(25-27°C)

Drying time （hard）	>72h(25-27°C)
Coating layer	2 times
Service life	> 10 years
Paint color	Multicolour
Storage	<30°C， cool， dry
Net Weight	5kg
Package	
Package Size	22*22*22cm

✅ ***Reference Dosage***： 2-3㎡/kg

✅ ***Tools***：wool roller、trowel





✅ roller ✅ trowel

06.*Substrate requirements*

① Water-resistant putty powder must be used, and the surface is smooth without falling off or falling off.

② (Slight) When the powder falls: Roller coat inorganic curing solution (10-20% with water) once, and then apply after 12 hours.

07.*Construction method*



01.Roll the same color primer twice



02.Thinly batch Velvet-II 1 time, let it dry



03.Irregular walking and scraping with a short knife for the second time Velvet-II



04.The third time irregular points can scrape out the texture batch by batch

08.*Shelf life*

12 months in a dry state at room temperature (at the time of original shipment)

09.*Implementation Standard*

GB 18582-2020 Limit of harmful substances of architectural wall coatings

10.*Environmental commitment*

This product does not add any heavy metals and other harmful substances, does not exceed the latest national standards for the limit of harmful substances in interior decoration materials, and is fully in line with the technical requirements of China's environmental products.

11. *Precautions*

1、Read the construction instructions of the package before use to get reliable and satisfactory painting effect.

2、Please effectively separate, cover and shield the area of wood products and walls.

3、Temperature lower than 10 °C, relative humidity greater than 80 % can not be constructed.

4、Colour difference may exist between different batches of the same model.

---

12. *Technical support*

For assistance, please consult Wanlei (0757-81760676).

WeChat Official Account

WeChat mini program